



Protect. Enhance. Outperform.

Durex[®]
Decorative
Floor Coating Systems

Protective & Decorative Systems

DURabond
TECHNICAL COATINGS LTD

Durex® Decorative Floor Coatings

Innovative Solutions for Uncompromised Protection

Durex® Technical Coatings offer a comprehensive line of professional grade liquid applied fast curing acrylic, epoxy and urethane based protective coating systems for both exterior and interior applications. System applications include advanced single component and multi component system options.

Engineered for today's most demanding applications

Our customizable and adaptable colour, chip flake, aggregate and specialty blended spectrum available in a variety of sheens, finishes and textures give the designer flexibility to produce a custom, attractive floor. For endless decorative flooring designs look to Durabond for a flooring solution that delivers on all fronts.

Decorative Flooring Intro

Durabond's line of high quality, low and zero VOC decorative floor coatings are engineered to produce a seamless, long lasting functional surface that is attractive, modern and aesthetically pleasing. Our Decorative Flooring Systems have adaptable decorative solutions from seamless, monolithic coatings to highly decorative,

colourful, vibrant and classic designs. Combined with Durabond's high performance floor coatings, the possibilities for a superior design with superior functionality are easy to find.



Environmentally Friendly Products for Our Future

Durex® Technical Coatings are formulated and manufactured to high standards of quality control with safety, and the environment in mind. With both Zero and low in VOC's water based options; Durex® Technical Coatings provide a tough, durable and resilient protective barrier without hurting our environment.



Available Solutions

Interior Coatings

Dur-A-Flakepage 4
Dur-A-Quartz Broadcast page 5
Dur-A-Quartz Trowel page 6
Granitechpage 7
Dur-A-Metallic & Dur-A-Glitter page 8
Epotel Terrazzo page 9

Exterior Coatings

Dur-A-Fast Broadcast Decorative Flooring Systempage 10
Dur-A-Fast Trowel Decorative Flooring System page 11
Decorative Faux Stone Flooring page 12
Primer and Top Coat Options page 13
System Selection Chart page 14 - 19



Durex® Dur-A-Flake

Decorative Seamless Chip Flake Epoxy Floor System



Ideal For

- Decorative Flooring applications subject to high traffic - commercial and retail applications
- Institutional Floors
- Health Care facilities and Laboratories
- Residential applications - residential garages

When to use


- Easy to Install, Economical, High Abrasion Decorative Floor

Features

- Economical and durable floor with excellent colour retention properties
- Contaminant Resistant - salt and light chemicals
- CFIA approved
- Does not support fungi or bacterial growth
- Limitless Colours Selections

Colour Availability

- Customizable, Pre-Blended Colour Flakes

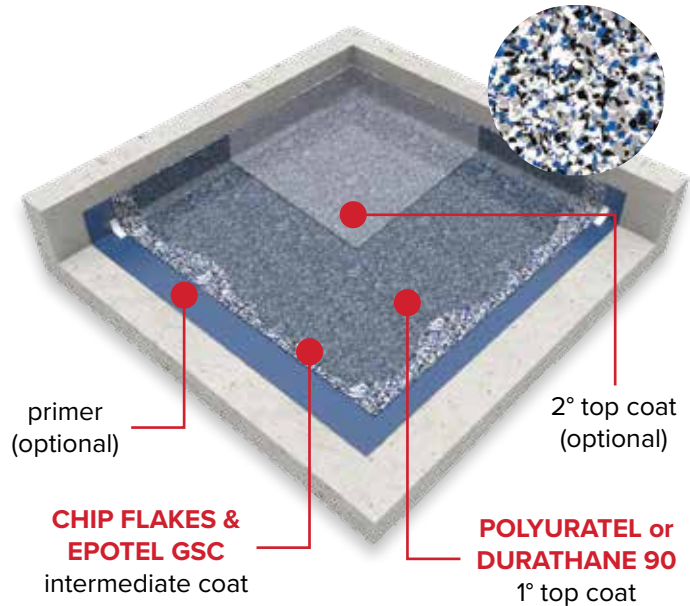

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER OPTIONAL	See Primer Options Chart	-	-	-
INTERMEDIATE COAT	Chip Flakes + Epotel GSC	15 mils	100 ft ² /Gal	10°C to 30°C
1° TOP COAT	Polyuratel or Durathane 90	5 - 10 mils	160 - 320 ft ² /Gal	10°C to 30°C
2° TOP COAT OPTIONAL	See Top Coat Options Chart	-	-	-

Durex® Dur-A-Quartz Broadcast

Broadcasted Coloured Quartz Flooring System



Ideal For

- Institutional Building
- Showers, Locker Rooms and Wash Down Areas
- Hospitals and Health Care Buildings

When to use

- Institutional, High Abrasion Spaces
- Decorative Commercial Floors


Features

- Multi-Tone Decorative Flooring
- Low Maintenance - Easy to Clean
- Quick Installation

Colour Availability

- Pre-Blended Aggregates
- Custom Blends Available

For exterior use, or high UV exposure, please contact your Durabond Technical Representative

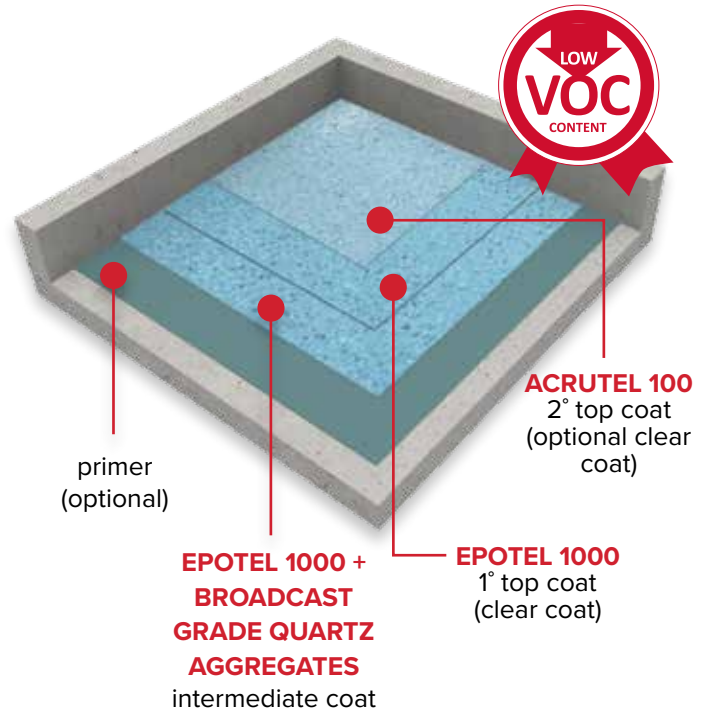

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER <i>OPTIONAL</i>	See Primer Options Chart	-	-	-
INTERMEDIATE COAT	Epotel 1000 + Coloured Quartz	30 mils	54 ft ² /Gal	10°C to 30°C
		1/16" - 1/8"	1.5 - 2 lbs/ft ²	10°C to 30°C
<i>Can be completed in 2 Coats at 15 mils + 0.75 lbs/ft² per coat</i>				
1° TOP COAT	Epotel 1000	10 - 20 mils	80 - 120 ft ² /Gal	10°C to 30°C
*2° TOP COAT <i>OPTIONAL</i>	Acrutel 100	5 mils	300 ft ² /Gal	10°C to 30°C

*See topcoat chart for different topcoat options.

Durex® Dur-A-Quartz Trowel

Troweled Coloured Quartz Flooring System



Ideal For

- Commercial / Industrial Display Areas
- Sloped Floors
- Heavy Duty Institutional seamless wet areas

When to use


- Decorative Floor Requiring Ultimate Protection from Mechanical Abuse
- Sloped Areas, Washrooms, Wash Bays

Features

- Durable Decorative Flooring
- Low Maintenance - Easy to Clean
- Coloured Floor System
- Wide & Customizable Colour Range (solid and mixed colours)

Colour Availability

- Pre-Blended Aggregates
- Custom Blends Available

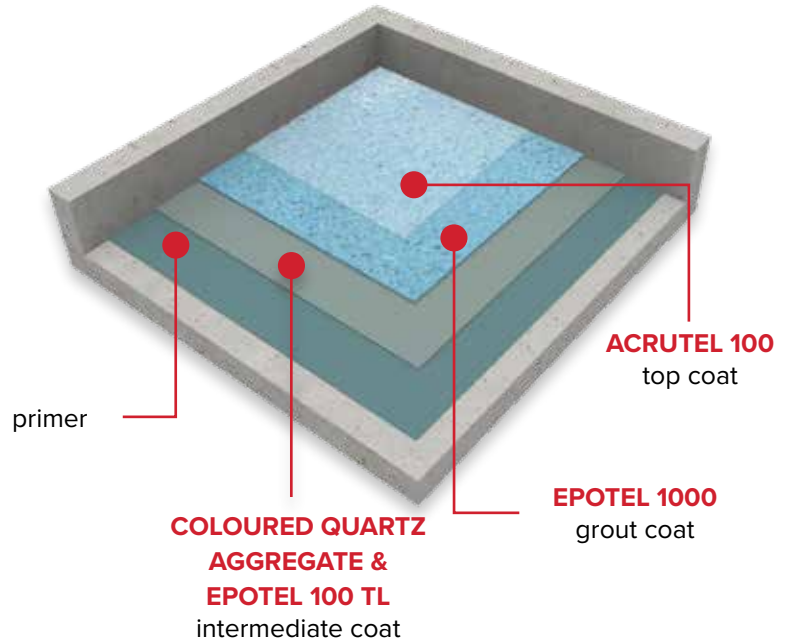

For exterior use, or high UV exposure, please contact your Durabond Technical Representative

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER <i>OPTIONAL</i>	See Primer Options Chart	-	-	-
PRIMER	Epotel TL	8 mils	200 ft ² /Gal	10°C to 30°C
INTERMEDIATE COAT	Coloured Quartz Aggregate & Epotel 100 TL	1/4" - 1/8"	35 - 70 ft ² /Gal	10°C to 30°C
GROUT COAT	Epotel 1000	15 - 20 mils	80 - 120 ft ² /Gal	10°C to 30°C
*TOP COAT	Acrutel 100	5 mils	300 ft ² /Gal	10°C to 30°C

*See topcoat chart for different topcoat options.

Durex® Granitech

Self-Leveling Granite Replicating Resinous Flooring System



Ideal For

- Commercial, Industrial Display Areas, and Showrooms
- Medical Facilities
- General Retail Flooring
- Residential Applications

When to use


- Low Maintenance Seamless Floor that Replicates Granite

Features

- Durable General Service Commercial Flooring
- Low Maintenance - Easy to Clean
- Natural Coloured Floor System
- Wide Colour Range
- Ease of Application

Colour Availability

- Pre-Blended
- Limited Colours

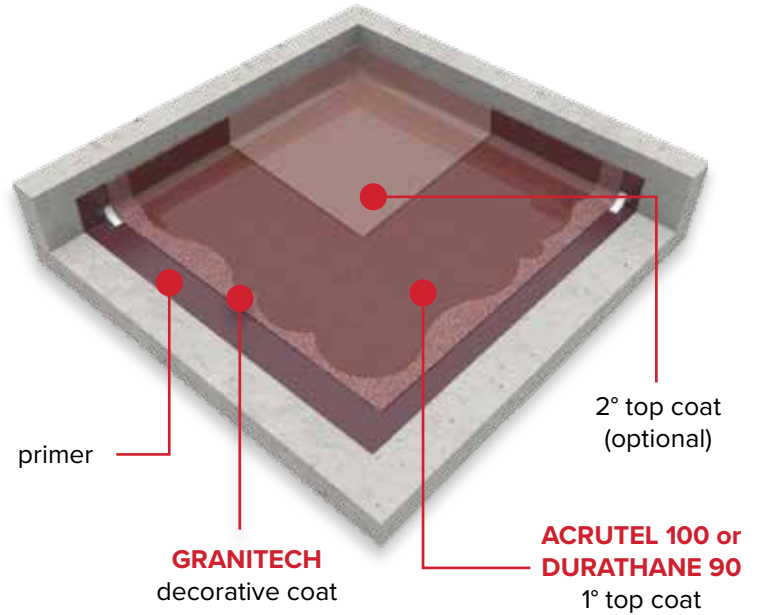

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER <i>OPTIONAL</i>	See Primer Options Chart	-	-	-
DECORATIVE COAT	Granitech (Decorative Mica Flakes - Optional)	1/16"	50 ft ² /Gal	10°C to 30°C
1° TOP COAT	Polyuratel or Durathane 90	5 - 10 mils	160 - 320 ft ² /Gal	10°C to 30°C
2° TOP COAT <i>OPTIONAL</i>	See Top Coat Options Chart	-	-	-



Durex® Dur-A-Metallic & Dur-A-Glitter

Metallic or Glitter Effect Decorative Epoxy Flooring System



Ideal for

- Commercial / Industrial Display Areas
- Showrooms
- General Retail Flooring

When to use


- Seamless Decorative Flooring with Metallic or Glitter Finish

Features

- Seamless Surface
- Abrasion Resistant
- Chemical Resistant
- Easily Cleaned
- Excellent Aesthetics

Colour Availability

- Pre-Blended
- Limited Colours

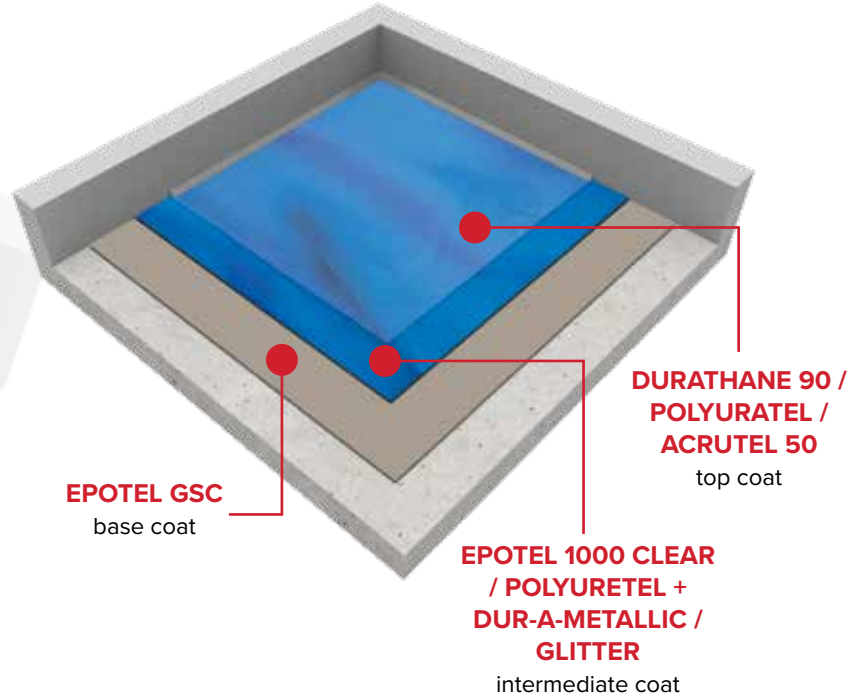

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER <i>OPTIONAL</i>	See Primer Options Chart	-	-	-
BASE COAT	Epotel GSC	10 mils	160 ft ² /Gal	10°C to 30°C
INTERMEDIATE COAT	Epotel 1000 Clear / Polyuratel + Dur-A-Metallic or Glitter Pigment	15 mils	106 ft ² /Gal	10°C to 30°C
TOP COAT	Durathane 90 / Acrutel 50 / Polyuratel	5 - 7 mils	200 ft ² /Gal	10°C to 30°C



Durex® Epotel Terrazzo

Epoxy Based Terrazzo Flooring System



Ideal For

- Office Complexes
- Airports & Government Offices
- Educational & Healthcare Institutions

When to use


- Highly Durable Decorative Floor with Low Life Cycle Cost

Features

- Durable Decorative Flooring
- Low Maintenance - Easy to Clean
- Chemical & Stain Resistant
- Weighs less than Traditional Terrazzo
- Wide & Customizable Colour Range (solid and mixed colours)

Colour Availability

- Pre-Blended Aggregates

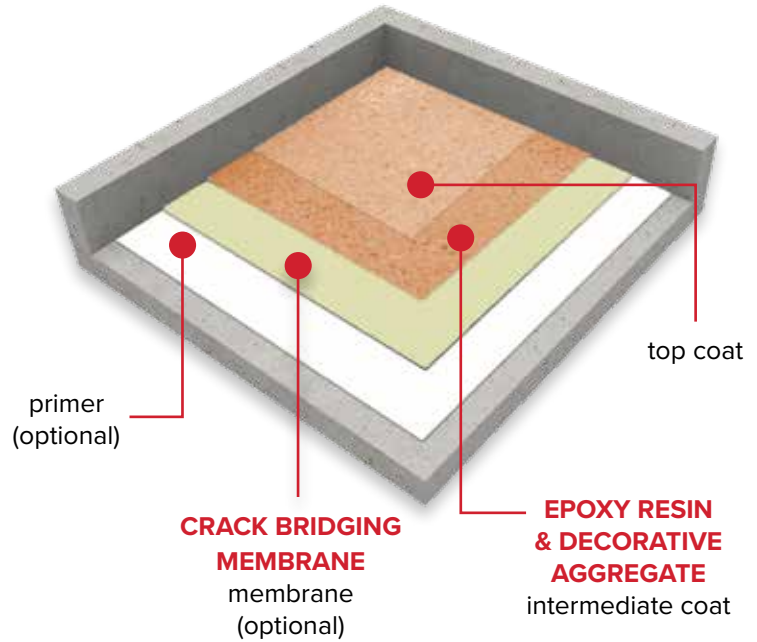

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	See Primer Options Chart	-	-	-
MEMBRANE <i>OPTIONAL</i>	Epotel UR (Crack Bridging Membrane)	40 mils	40 ft ² /Gal	10°C to 30°C
INTERMEDIATE COAT	Epotel Terrazzo + Decorative Aggregate	1/4" - 3/8"	8 - 12 ft ² /Gal	10°C to 30°C
TOP COAT	See Top Coat Options Chart	-	-	-

Durex® Dur-A-Fast Broadcast Decorative Flooring System

PMMA Based High-Build, Broadcasted Floor System



Ideal for

- Commercial / Industrial Display Areas Subject to UV Exposure
- Residential Applications & Outdoor Patios

When to use


- Decorative Floor Subject to Extreme Mechanical Abuse

Features

- Durable General Service Commercial Flooring
- Low Maintenance - Easy to Clean
- Natural Coloured Floor System
- Wide Colour Range
- Rapid Installation and Curing
- Available with Waterproofing Membrane

Colour Availability

- Pre-Blended
- Limited Colours

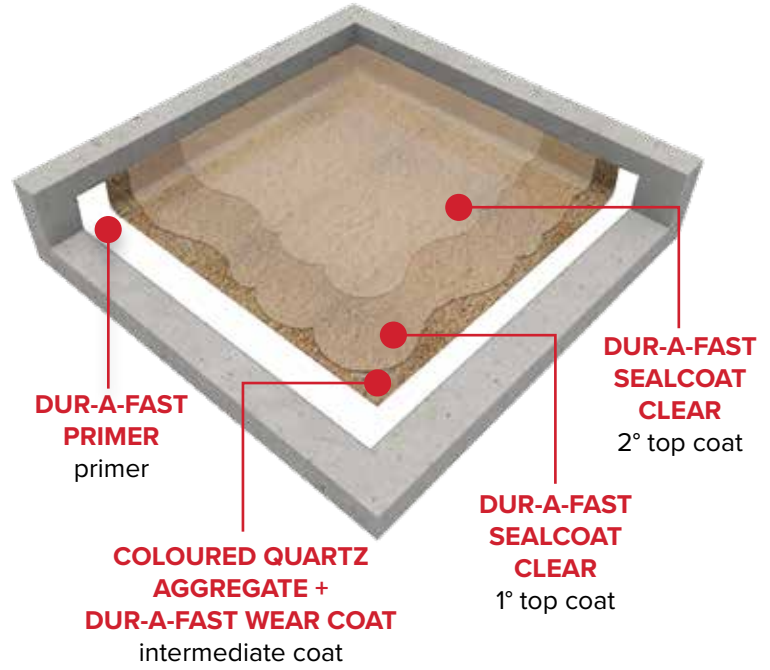

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	Dur-A-Fast Primer	8 mils	200 ft ² /Gal	-20°C to 30°C
INTERMEDIATE COAT	Coloured Quartz Aggregate & Dur-A-Fast Wear Coat	1/8" - 3/16"	35 ft ² /Gal	-20°C to 30°C
1° TOP COAT	Dur-A-Fast Sealcoat Clear or Polyuretel	10 mils	160 ft ² /Gal	10°C to 30°C
2° TOP COAT	Dur-A-Fast Sealcoat Clear or Polyuretel	10 mils	160 ft ² /Gal	10°C to 30°C



Durex® Dur-A-Fast Trowel Decorative Flooring System

PMMA Based High-Build, Trowel Applied Decorative Floor System



Ideal for

- Residential Patios
- High Traffic Areas

When to use


- Decorative Applications

Features

- Multi-Tone Decorative Flooring
- Very versatile Artistic Design Potentials
- Membrane Available for Waterproofing
- Rapid Installation and Curing
- Seamless Stone Appearance

Colour Availability

- Pre-Blended
- Limited Colour

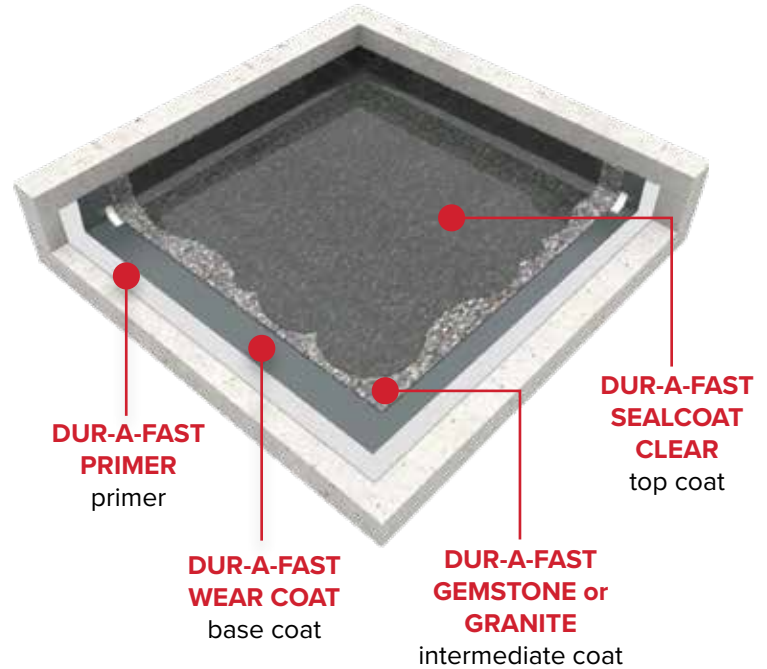

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	Dur-A-Fast Primer	8 mils	200 ft ² /Gal	-20°C to 30°C
BASE COAT	Dur-A-Fast Wear Coat	10 mils	160 ft ² /Gal	-20°C to 30°C
INTERMEDIATE COAT	Dur-A-Fast Gemstone or Granite Trowel	1/8" - 1/4"	20 ft ² /Kit	10°C to 30°C
TOP COAT	Dur-A-Fast Sealcoat or Polyuretel	10 mils	160 ft ² /Gal	10°C to 30°C

*Please contact a Durabond Technical Representative for On-Grade Applications.



Durex® ART-I-STONE

Decorative Faux Stone Flooring



Ideal for

- Commercial / Industrial Display Areas Subject to UV Exposure
- Outdoor Patios & Walkways
- Driveways

When to use


- Residential

Features

- Versatile Artistic Floor System
- Very versatile Artistic Design Potentials
- Multitude of Pattern & Texture Potential

Colour Availability

- Custom Hand Tinted
- Decorated by Applicator

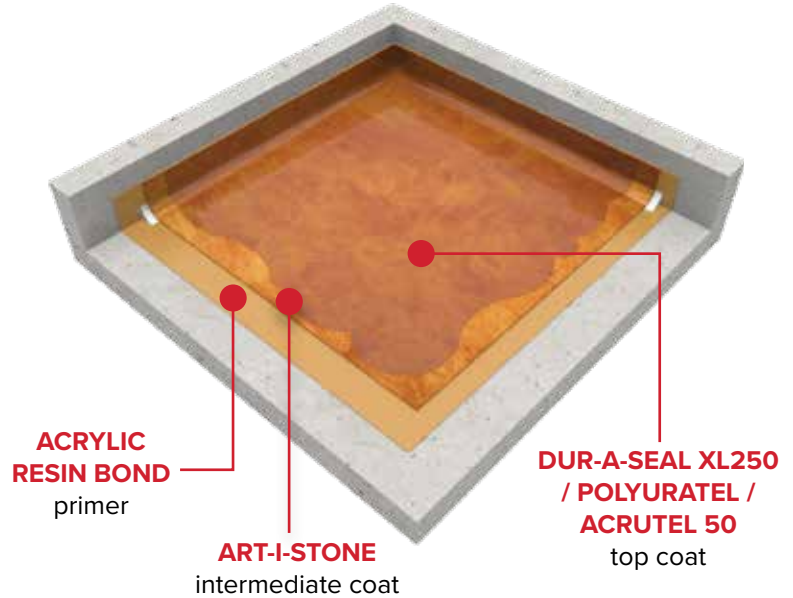


COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	Acrylic Resin Bond	5 mils	200 ft ² /Gal	-
INTERMEDIATE COAT	Art-I-Stone	1/8" - 3/16"	35 ft ² /Bag	5°C to 30°C
TOP COAT	Dur-A-Seal XL250 / Polyuratel / Acrutel 50	5 - 7 mils	150 - 200 ft ² /Gal	5°C to 30°C



Decorative Floor Coating Options

Use this chart to choose the necessary components for the performance requirements of your system.

Primer Options

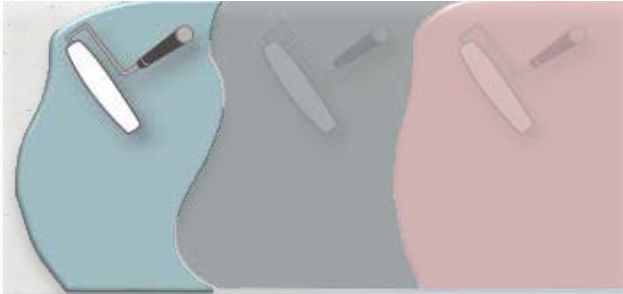

Top Coat Options



PRIMER OPTION	ADVANTAGES / USE
Epotel Moisture Block	<p>Advantage: Moisture Mitigating (Blocking) Primer</p> <p>Use: For Concrete Slabs with high moisture content and freshly poured slabs (over 14 days old).</p> <p>Coverage: 72 ft²/Gal @22 mils 95 ft²/Gal @17 mils</p>
Uraflex Citrus Primer	<p>Advantage: Penetrating Primer that adheres to oil and similar contaminants</p> <p>Use: For oil or grease contaminated floors</p> <p>Coverage: 200 ft²/Gal @6 mils DFT</p>
Epotel Multi-Prime	<p>Advantage: Penetrating Primer. VOC Free</p> <p>Use: For better adhesion onto concrete</p> <p>Coverage: 200 ft²/Gal @8 mils DFT</p>
Epotel 80	<p>Advantage: Solvent Based Penetrating Primer</p> <p>Use: For better adhesion onto concrete</p> <p>Coverage: 250 ft²/Gal @7 mils DFT 400 ft²/Gal @4 mils DFT</p>

TOP COAT OPTION	ADVANTAGES / USE
AcruTel 50	<p>Advantage: Easy to Apply Sheen Control & Abrasion Resistant Topcoat</p> <p><i>Available in Matte, Satin, Semi-Gloss, and Gloss</i></p> <p>Use: For Medium Traffic and Foot Traffic Applications and for sheen control on decorative floors</p> <p>Coverage: 300 ft²/Gal @3 mils DFT <i>2 coats recommended</i></p>
Durathane 90	<p>Advantage: Extremely durable UV Resistant clear topcoat. <i>High Gloss.</i></p> <p>Use: For a durable, heavy duty topcoat</p> <p>Coverage: 400 ft²/Gal @3 mils DFT <i>2 coats recommended</i></p>
Polyuratel	<p>Advantage: Virtually Odour Free Clear and Pigmented Topcoat. <i>Rapid Curing</i></p> <p>Use: For durable low odour, quick turn-around and pigmented (coloured) applications</p> <p>Coverage: 320 ft²/Gal @5 mils DFT <i>2 coats recommended</i></p>

Decorative Flooring Systems

System Description

Uses / Features

Isometric

Applicable Substrates


Durex® Dur-A-Flake

Decorative Seamless Chip Flake Epoxy Floor System

System Thickness: 20 - 30 Mils

- Commercial and retail
- Institutional Floors
- Health Care Facilities & Labs
- Residential Garages

- Economical and durable floor with excellent colour retention
- Contaminant Resistant
- CFIA approved
- Anti-Fungal & Anti-Bacterial

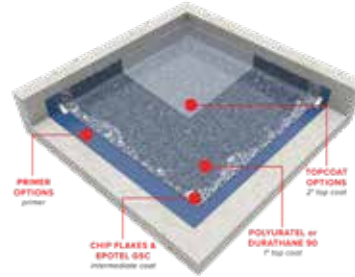

• Concrete


Durex® Dur-A-Quartz Broadcast

Broadcasted Coloured Quartz Flooring System

System Thickness: 1/8"

- Commercial & Institutional
- Low Abrasion Spaces
- Commercial Retail Floors
- Institutional Seamless Wet Areas

- Multi-Tone Decorative Flooring
- Low Maintenance / Easy to Clean
- Quick Installation

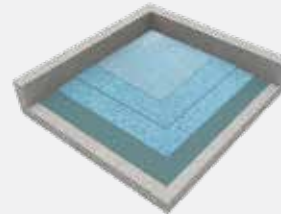

• Concrete


Durex® Dur-A-Quartz Trowel

Troweled Coloured Quartz Flooring System

System Thickness : 1/8" - 3/16"

- Commercial & Industrial Display Areas
- Sloped Floors
- Heavy Duty Institutional Seamless Wet Areas

- Durable Decorative Flooring
- Low Maintenance & Easy to Clean
- Coloured Floor System
- Wide & Customizable Colour Range

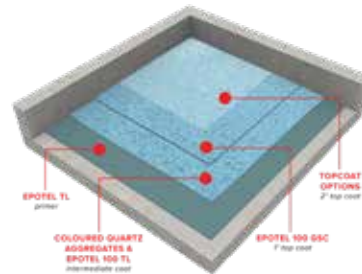

• Concrete


Durex® Granitech

Self-Leveling Granite Flooring System

System Thickness : 1/16" - 1/8"

- Commercial & Industrial Display Areas
- Automotive Showrooms
- General Retail Flooring

- Durable General Service Commercial Flooring
- Low Maintenance & Easy to Clean
- Natural Coloured Floor System
- Wide Colour Range

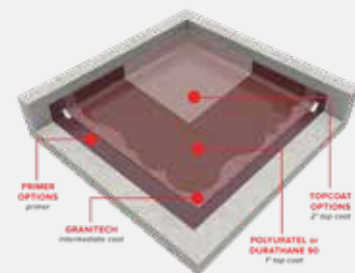

• Concrete

Primer	Intermediate Coat	1st Topcoat	2nd Topcoat	Pedestrian Traffic	Vehicle Traffic	Anti Slip	Chem. Res.	Suit ability	Initial Dry	Final Cure	Tint	Temp. Range
--------	-------------------	-------------	-------------	--------------------	-----------------	-----------	------------	--------------	-------------	------------	------	-------------

Primer Options	Chip Flakes & Epotel GSC Pigmented DFT: 15 mils	Polyuratel or Durathane 90 DFT: 10 mils	Topcoat Options	High	Light	✓	Very Good	Best	8 Hours	4 - 6 Days	✓	10°C to 30°C
----------------	--	--	-----------------	------	-------	---	-----------	------	---------	------------	---	--------------

Primer Options	Epotel 1000 + Broadcast Grade Quartz Aggregates DFT: 30 mils + 1/16"-1/8"	Epotel 1000 (Grout Coat) DFT: 25 mils	Acrutel 100 DFT: 5 mils	High	Light to Medium	✓	Very Good	Best	8 Hours	4 - 6 Days	✓	10°C to 30°C
----------------	--	--	----------------------------	------	-----------------	---	-----------	------	---------	------------	---	--------------

Primer Options	Coloured Quartz Aggregate & Epotel 100 TL DFT: 1/4" - 1/8"	Epotel 1000 DFT: 5 - 10 mils	Acrutel 100 DFT: 5 mils	High	Light to Medium	✓	Very Good	Best	8 Hours	4 - 6 Days	✓	10°C to 30°C
----------------	---	---------------------------------	----------------------------	------	-----------------	---	-----------	------	---------	------------	---	--------------

Primer Options	Granitech DFT: 1/16"	Polyuratel or Durathane 90 DFT: 5 - 10 mils	Topcoat Options	High	Light to Medium	✓	Very Good	Best	8 Hours	4 - 6 Days	✓	10°C to 30°C
----------------	-------------------------	--	-----------------	------	-----------------	---	-----------	------	---------	------------	---	--------------

Decorative Flooring Systems

System Description

Uses / Features

Isometric


Applicable Substrates

Durex® Dur-A-Metallic

Metallic Effect Decorative Epoxy Flooring System

System Thickness: 30 Mils

- Commercial / Industrial Display Areas
 - Showrooms
 - General Retail Flooring
-
- Seamless Surface
 - Abrasion Resistant
 - Chemical Resistant
 - Easily Cleaned
 - Excellent Aesthetics

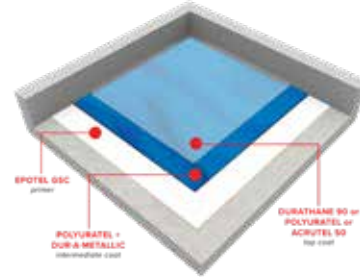


• Concrete

Durex® Dur-A-Glitter

Glitter Effect Decorative Epoxy Flooring System

System Thickness: 30 mils

- Commercial / Industrial Display Areas
 - Showrooms
 - General Retail Flooring
-
- Seamless Surface
 - Abrasion Resistant
 - Chemical Resistant
 - Easily Cleaned
 - Excellent Aesthetics

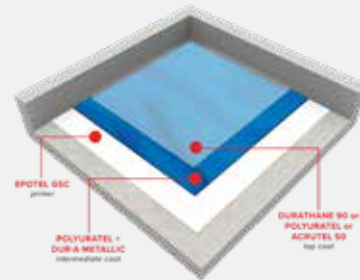


• Concrete

Durex® Epotel Terrazzo

Epoxy Based Terrazzo Flooring System

System Thickness: 30 mils

- Commercial / Industrial Display Areas
 - Showrooms
 - General Retail Flooring
-
- Durable Decorative Flooring
 - Low Maintenance - Easy to Clean
 - Chemical & Stain Resistant
 - Weighs Less than Traditional Terrazzo
 - Wide & Customizable Colour Range (solid and mixed colours)

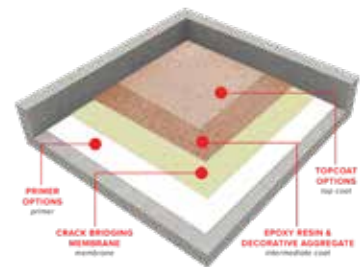

• Concrete

Primer	Intermediate Coat	1st Topcoat	Pedestrian Traffic	Vehicle Traffic	Anti Slip	Chem. Res.	Suit ability	Initial Dry	Final Cure	Tint	Temp. Range
--------	-------------------	-------------	--------------------	-----------------	-----------	------------	--------------	-------------	------------	------	-------------

Epotel GSC <i>(Depending on conditions)</i> <i>DFT: 10 mils</i>	Epotel 1000 Clear / Polyuretel + Dur-A-Metallic Pigment <i>DFT: 15 mils</i>	Polyuratel or Durathane 90 or Acrutel 50 <i>DFT: 5 - 7 mils</i>	High	Light	✓	Very Good	Best	8 Hours	4 - 6 Days	✓	10°C to 30°C
---	--	--	------	-------	---	-----------	------	---------	------------	---	--------------

Epotel GSC <i>(Depending on conditions)</i> <i>DFT: 10 mils</i>	Epotel 1000 Clear / Polyuretel + Dur-A-Metallic Pigment <i>DFT: 15 mils</i>	Polyuratel or Durathane 90 or Acrutel 50 <i>DFT: 5 - 7 mils</i>	High	Light	✓	Very Good	Best	8 Hours	4 - 6 Days	✓	10°C to 30°C
---	--	--	------	-------	---	-----------	------	---------	------------	---	--------------

Primer of Choice + Epotel UR (Crack Bridging Membrane) <i>DFT: 40 mils</i>	Epotel Terrazzo & Decorative Aggregate <i>DFT: 1/4" - 3-8"</i>	Topcoat of Choice	High	Light	✓	Very Good	Best	8 Hours	4 - 6 Days	✓	10°C to 30°C
---	---	-------------------	------	-------	---	-----------	------	---------	------------	---	--------------

System Description

Uses / Features

Isometric

Applicable Substrates


Durex® Dur-A-Fast Broadcast Decorative Flooring System

High Build Decorative Flooring

System Thickness : 1/8" - 3/16"

- Commercial / Industrial Display Areas Subject to UV Exposure
- Residential applications
- Outdoor Patios

- Durable General Service Commercial Flooring
- Low Maintenance - Easy to Clean
- Natural Coloured Floor System
- Wide Colour Range

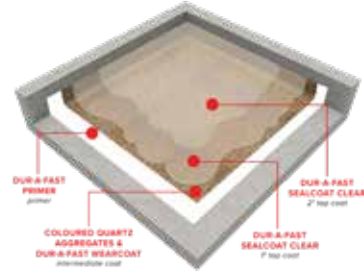

- Wood
- Concrete


Durex® Dur-A-Fast Trowel Decorative Flooring System

High Build Decorative Flooring

System Thickness : 1/16" - 1/8"

- Residential Patios
- High Traffic Areas

- Multi-Tone Decorative Flooring
- Very versatile Artistic Design Potentials
- Seamless Stone Appearance

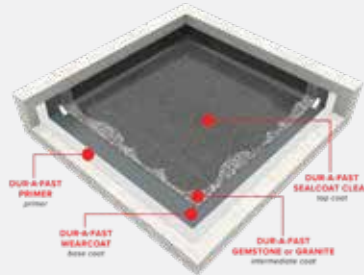

- Wood
- Concrete


Durex® ART-I-STONE

Decorative Faux Stone Flooring

System Thickness : 1/8" - 1/4"

- Office Complexes
- Airports & Government Offices
- Educational & Healthcare Institutions

- Versatile Artistic Floor System
- Very versatile Artistic Design Potentials
- Multitude of Pattern & Texture Potential

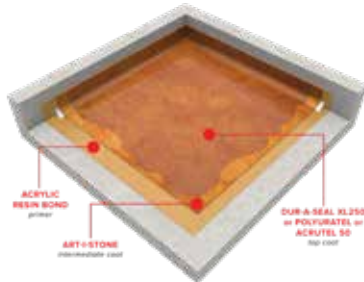

- Concrete

Primer	Intermediate Coat	1st Topcoat	Pedestrian Traffic	Vehicle Traffic	Anti Slip	Chem. Res.	UV Res.	Suit ability	Initial Dry	Final Cure	Tint	Temp. Range
Dur-A-Fast Primer <i>DFT: 8 mils</i>	Coloured UV Grade Quartz Aggregate & Dur-A-Fast Wear Coat <i>DFT: 1/8" - 3/16"</i>	Dur-A-Fast Sealcoat Clear or Polyuratel requires 2 coats <i>DFT: 20 mils</i>	High	Medium	✓	Good	UVR1	Best	8 - 12 Hours	4 - 6 Days	✓	10°C to 30°C
Dur-A-Fast Primer followed by Dur-A-Fast Wear Coat <i>DFT: 8 + 10 mils</i>	Dur-A-Fast Gemstone or Granite <i>DFT: 1/8" - 1/4"</i>	Dur-A-Fast Sealcoat Clear or Polyuratel <i>DFT: 10 mils</i>	High	Light to Medium	✓	Good	UVR1	Best	8 - 12 Hours	4 - 6 Days	✓	10°C to 30°C
Acrylic Resin Bond <i>DFT: 8 mils</i>	Art-I-Stone <i>DFT: 3 - 5 mils</i>	Dur-A-Seal XL250 <i>DFT: 5 - 7 mils</i>	High	Light to Medium	✓	Good	UVR1	Best	12 - 24 Hours	5 - 7 Days	✓	10°C to 30°C

Find our system brochures online or
ask your Durabond Representative



www.durabond.com

DURabond
TECHNICAL COATINGS LTD

Head Office

6178 Netherhart Road, Mississauga, Ontario Canada L5T 1B7
Tel 905.565.9283 Fax 905.565.9365 info@durabond.com

Scarborough Office

55 Underwriters Road, Scarborough, Ontario Canada M1R 3B4
Tel 416.759.4474 Fax 416.759.4470 info@durabond.com

Edmonton Office

14345 120th Avenue, Edmonton, Alberta Canada T5L 2R8
Tel 780.451.6364 Fax 780.453.9056 info@durabond.com

Toll Free (North America): 1.877.387.2266

The recommendations and information in this chart/document are for the application of Durex® products manufactured by Durabond, and are based on practical knowledge for general site conditions and uses. This chart is to be used as a reference guide only to identify and display the various products for general, non-site specific applications for a variety of installations. Differences in site conditions, preparations, materials are continuously variable and unknown.

As such, no warranty, guarantee or legal binding relationship is implied whatsoever with these products and systems and no guarantee can be made to their performance. In addition, preparation and condition of the substrate is of such utmost importance that a Durabond Technical Representative must be notified prior to installation of any of the aforementioned products and/or systems.

An installer must always prepare the surface to the recommendations found on the current data sheet of each product written and produced by Durabond Technical Coatings Limited. These data sheets can be obtained from Durabond's website, www.durabond.com, or by contacting a Technical Sales Representative directly.