

Durex® Duracrete Self-Leveling System

Self-Leveling Epoxy Surfacing System



Ideal For

- Light to Heavy Duty Manufacturing Facilities
- Animal Laboratories & Housing
- Automotive Maintenance Facilities
- Institutional and Recreational Facilities
- Garbage and Laundry Rooms
- Traffic Aisles

When to use


- *Dependant on Component Option*
- High Abrasion and Impact Resistance
- Good Mechanical & Chemical Resistance
- Easily Cleaned & Maintained
- Durable, Impermeable, and Seamless

Features

- Does Not Support Bacteria or Fungi Growth
- Neutral Odour
- CFIA & USDA Approved

Colour Availability

- Tinted + Clear

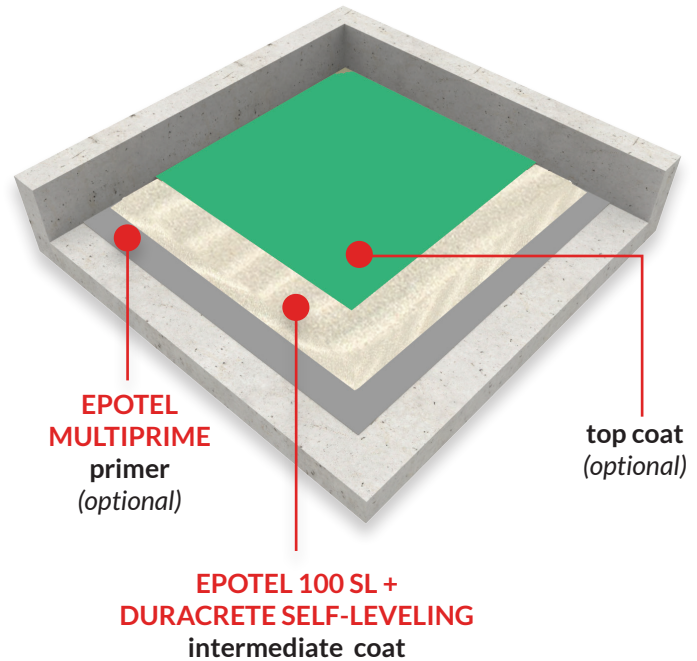

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER (OPTIONAL)	See Primer Options Chart	-	-	-
INTERMEDIATE COAT	Epotel 100 SL + Duracrete Self-Leveling	60 - 80 mils	45 ft ² /Gal	10°C to 35°C
TOP COAT (OPTIONAL)	See Top Coat Options Chart	-	-	-



Epoxy Flooring Systems | Self-Leveling Component Options

Use this chart to choose the necessary components for the performance requirements of your system.

System Component Option	Features	Coating System Components		
		Primer	Intermediate Coat	Topcoat
<p>Durex® Duracrete Self-Leveling with Epotel CR <i>Chemical Resistant Floor</i></p> <hr/> <p><i>System Thickness: 1/8" (total system)</i></p>	<ul style="list-style-type: none"> • High Commercial Quality • High Chemical Resistance • Fast Curing 		<p>Epotel 100 CR (60 mils) + Duracrete Self-Leveling</p> <hr/> <p><i>DFT: 1/16"</i></p>	<p>(optional top coat) Epotel 100 CR <i>(Multiple Coats Possible for Increased Protection)</i></p> <hr/> <p><i>DFT: 10 mils</i></p>
<p>Durex® Duracrete Self-Leveling with Epotel Novolac <i>Outstanding Chemical Resistant Floor</i></p> <hr/> <p><i>System Thickness: 1/8" (total system)</i></p>	<ul style="list-style-type: none"> • Ultra High Chemical Resistance • Best Available Chemical Resistance 	<p>Epotel Multiprime (optional) <i>DFT: 8 mils</i></p>	<p>Epotel 100 Novolac (60 mils) + Duracrete Self-Leveling</p> <hr/> <p><i>DFT: 1/16"</i></p>	<p>(optional top coat) Epotel 100 Novolac <i>(Multiple Coats Possible for Increased Protection)</i></p> <hr/> <p><i>DFT: 10 mils</i></p>
<p>Durex® Duracrete Self-Leveling with Epotel SL <i>High Performance Epoxy Floor</i></p> <hr/> <p><i>System Thickness: 1/8" (total system)</i></p>	<ul style="list-style-type: none"> • Available in Rapid Cure • Cost Effective Versatile Protective Flooring 		<p>Epotel 100 SL (60 mils) + Duracrete Self-Leveling</p> <hr/> <p><i>DFT: 1/16"</i></p>	<p>(optional top coat) Epotel 100 SL <i>(Multiple Coats Possible for Increased Protection)</i></p> <hr/> <p><i>DFT: 10 mils</i></p>