

Durex® Dur-A-Comfort ERGO

Ergonomic, sound absorbing, polyurethane system (4mm)



DESCRIPTION

Ergonomic system with 2mm shock absorbing layer where comfort is more required

IDEAL FOR



Laboratories and hospitals
Normal dry process areas

FEATURES

Sound and shock absorbing
Resist 80°C water temperatures
High abrasion resistance
Seamless and hygienic finish
Easy-to-clean and sterilise
Low maintenance cost
Low odour during installation

COLOUR AVAILABILITY

Tinted (any colour)
Chip flakes

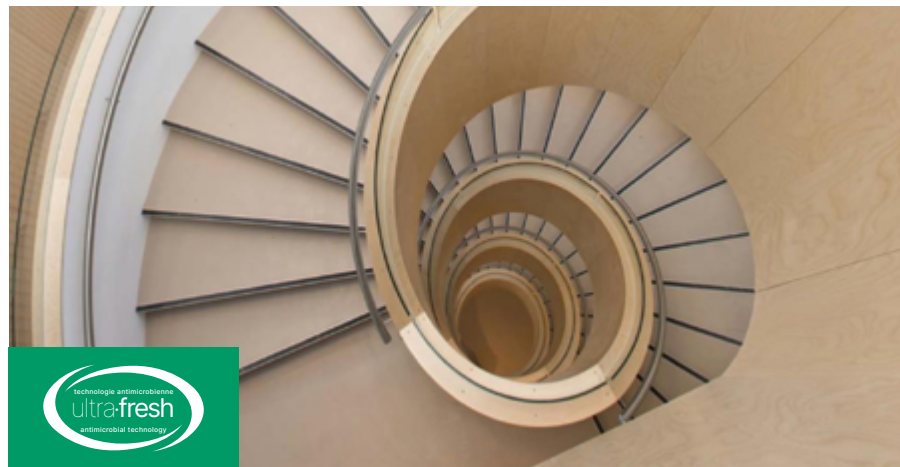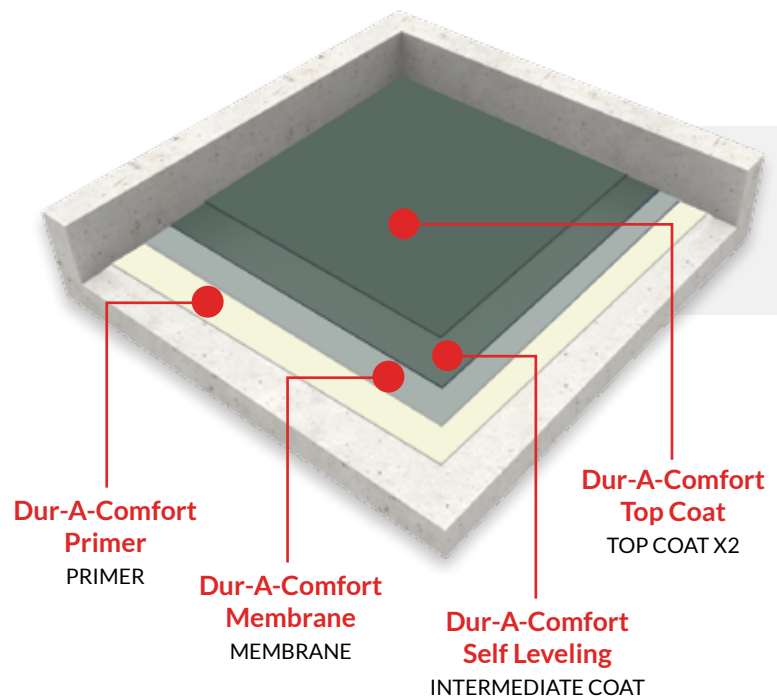

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
Primer	Dur-A-Comfort Primer	8 mils	200 ft ² /gal	10°C to 30°C
Membrane	Dur-A-Comfort Membrane	2 mm (80 mils)	90 ft ² /kit	10°C to 30°C
Intermediate Coat	Dur-A-Comfort Self Leveling	2 mm (80 mils)	70 ft ² /kit	10°C to 30°C
Top Coat x2	Dur-A-Comfort Top Coat	5 mils	320 ft ² /gal	10°C to 30°C