

Durex® Duracrete Trowel Floor System

Heavy to Extreme Industrial Floors, Processing Plants, and Containment Areas



Ideal For

- Garbage Rooms & Garage Bays
- High Demand Processing Plants
- Secondary Containment Areas
- Sloped Areas

When to use


- *Dependant on Component Option*
- High Traffic Aisles
- Superior Mechanical Resistance
- High Chemical Resistance
- Heavy Duty Manufacturing Areas
- Wet & Dry Processing Areas

Features

- High Abrasion & Impact Resistant Seamless Floor
- Does Not Support the Growth of Bacteria or Fungi
- Neutral Odour and CFIA & USDA Approved

Colour Availability

- Tinted + Clear

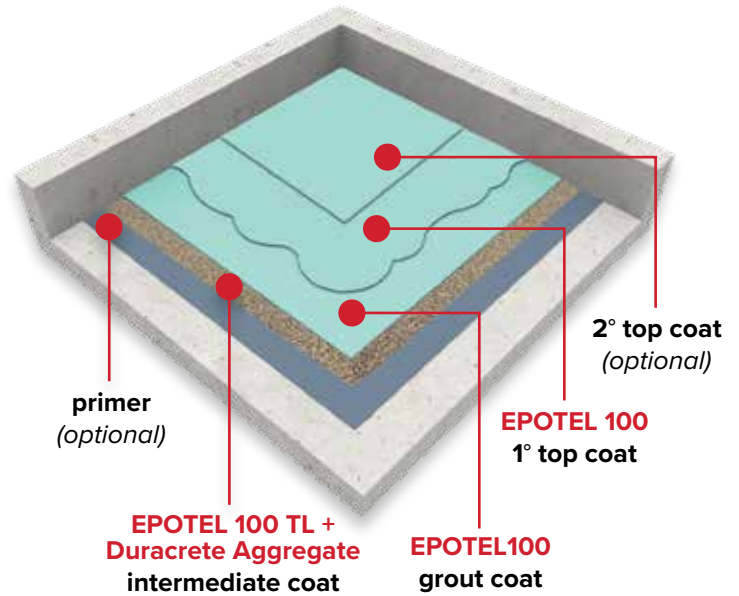

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER (OPTIONAL)	See Primer Options Chart	-	-	-
INTERMEDIATE COAT	EPOTEL 100 TL + Duracrete Aggregate	1/4"	12 ft ² /15 Kg Bag + 2.5 L Liquids	10°C to 35°C
GROUT COAT	EPOTEL 100 (Component Option)	15 - 20 mils	80 - 120 ft ² /Gal	10°C to 35°C
1° TOP COAT	EPOTEL 100 (Component Option)	10 - 15 mils	120 - 160 ft ² /Gal	10°C to 35°C
2° TOP COAT (OPTIONAL)	See Top Coat Options Chart	-	-	-

