

Durex® Duracrete Trowel Floor System

Trowel Epoxy Flooring System



Ideal For

- Garbage Rooms & Garage Bays
- High Demand Processing Plants
- Secondary Containment Areas
- Sloped Areas

When to use


- *Dependant on Component Option*
- High Traffic Aisles
- Superior Mechanical Resistance
- High Chemical Resistance
- Heavy Duty Manufacturing Areas
- Wet & Dry Processing Areas

Features

- High Abrasion & Impact Resistant Seamless Floor
- Does Not Support the Growth of Bacteria or Fungi
- Neutral Odour and CFIA & USDA Approved

Colour Availability

- Tinted + Clear

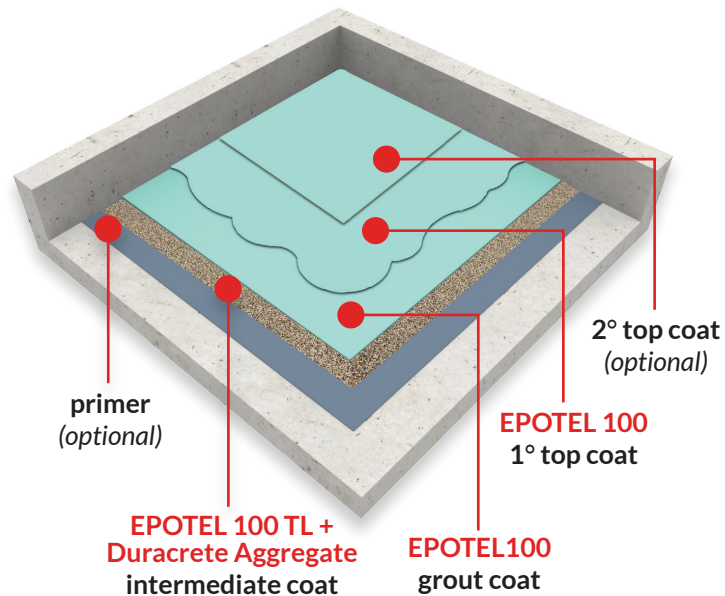

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER (OPTIONAL)	See Primer Options Chart	-	-	-
INTERMEDIATE COAT	EPOTEL 100 TL + Duracrete Aggregate	1/4"	12 ft ² /15 Kg Bag + 2.5 L Liquids	10°C to 35°C
GROUT COAT	EPOTEL 100 (Component Option)	15 - 20 mils	80 - 120 ft ² /Gal	10°C to 35°C
1° TOP COAT	EPOTEL 100 (Component Option)	10 - 15 mils	120 - 160 ft ² /Gal	10°C to 35°C
2° TOP COAT (OPTIONAL)	See Top Coat Options Chart	-	-	-



Industrial Flooring Systems | Trowel Grade Component Options

Use this chart to choose the necessary components for the performance requirements of your system.

System Description	Features	Coating System Components			
		Primer	Intermediate Coat	Grout Coat	Topcoat
<p>Durex® Duracrete Trowel Grade with Uraflex 100 <i>High Impact Resistance</i></p> <hr/> <p><i>System Thickness: 1/4 - 3/8"</i></p>	<ul style="list-style-type: none"> • High Impact/Shock Absorbing • Flexible Topcoat • Unique Urethane / Epoxy Blend 			<p>Epotel 100 GSC</p> <hr/> <p><i>DFT: 10 - 20 mils</i></p>	<p>Uraflex 100 <i>(Multiple Coats Possible for Increased Protection)</i></p> <hr/> <p><i>DFT: 10 mils</i></p>
<p>Durex® Duracrete Trowel Grade with Epotel CR <i>Chemical Resistant Floor</i></p> <hr/> <p><i>System Thickness: 1/4 - 3/8"</i></p>	<ul style="list-style-type: none"> • High Chemical Resistance • Fast Curing 	Epotel TL (optional)	Epotel 100 TL + Duracrete Aggregate <i>DFT: 1/4"</i>	<p>Epotel 100 CR</p> <hr/> <p><i>DFT: 10 - 20 mils</i></p>	<p>Epotel 100 CR <i>(Multiple Coats Possible for Increased Protection)</i></p> <hr/> <p><i>DFT: 10 mils</i></p>
<p>Durex® Duracrete Trowel Grade with Epotel Novolac <i>Outstanding Chemical Resistant Floor</i></p> <hr/> <p><i>System Thickness: 1/4 - 3/8"</i></p>	<ul style="list-style-type: none"> • Ultra High Chemical Resistance • Best Available Chemical Resistance 	<i>DFT: 8 mils</i>		<p>Epotel 100 Novolac</p> <hr/> <p><i>DFT: 10 - 20 mils</i></p>	<p>Epotel 100 Novolac <i>(Multiple Coats Possible for Increased Protection)</i></p> <hr/> <p><i>DFT: 10 mils</i></p>
<p>Durex® Duracrete Trowel Grade with Epotel GSC <i>High Performance Floor - Available in Rapid Cure</i></p> <hr/> <p><i>System Thickness: 1/4 - 3/8"</i></p>	<ul style="list-style-type: none"> • Cost Effective Versatile Protective Flooring • Available in Rapid Cure 			<p>Epotel 100 GSC</p> <hr/> <p><i>DFT: 10 - 20 mils</i></p>	<p>Epotel 100 GSC <i>(Multiple Coats Possible for Increased Protection)</i></p> <hr/> <p><i>DFT: 10 mils</i></p>