

Durex® Dur-A-Fast Coating System

PMMA Based Coating System for Protecting Interior and Exterior Concrete Surfaces



Description

PMMA (polyurethane modified methyl methacrylate) based coating system for protecting interior and exterior concrete surfaces. Durex® Dur-A-Fast Coating System is extremely rapid curing, 1-day installation, UV stable, can be applied in cold temperatures and can be accessed 1 hour after the final coat has been installed.

When to use


- Protection of exterior and interior floors.
- Rapid Installation and Return to Service (in 2 hours)
- Cold Temperature Applications (down to -20°C)

Features

- PMMA based coating technology
- Extremely rapid curing, ready for subsequent coats in 45 minutes.
- Can be accessed 1 hour after final coat
- Cold curing capabilities down to -20°C
- High chemical resistance to acids, alkalis, salts, seawater, sewage and other compounds

Colour Availability

- Tinted + Clear

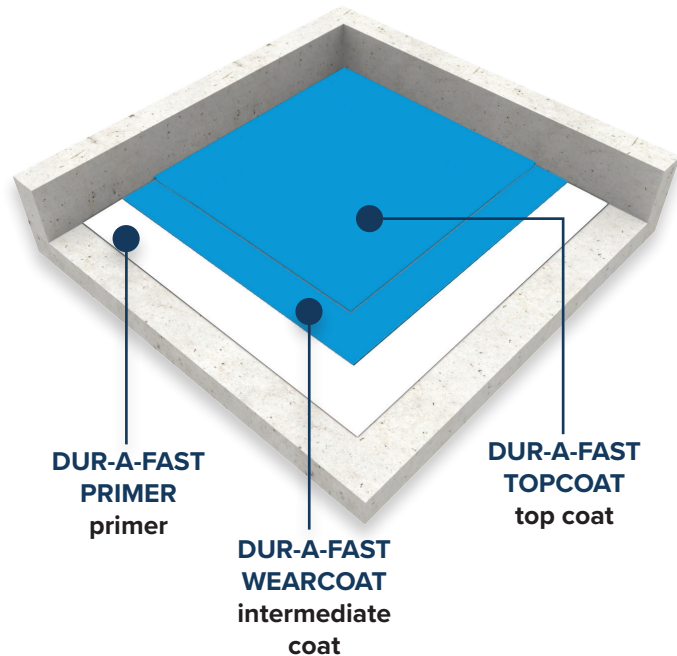

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	Dur-A-Fast Primer	10 mils	150 ft ² /Gal	-20°C to 30°C
INTERMEDIATE COAT	Dur-A-Fast Wearcoat	40 mils	40 ft ² /Gal	-20°C to 30°C
TOP COAT	Dur-A-Fast Topcoat	15 mils	106 ft ² /Gal	-20°C to 30°C