

Durex® Dur-A-Fast Traffic Bearing Waterproofing System Rapid Return to Service, High Abrasion Resistant PMMA Based

Traffic Bearing Waterproofing System



Ideal For

- Parking Decks & Structures
- Turn and Drive Lanes, and Helical Turn Ramps

When to use


- Rapid Turn Around
- · High Performance Durability
- · Very High Adhesion & Abrasion Resistance

Features

- PMMA Technology
- · Very Effective Waterproofing Membrane - 100% Solids
- Extra High Traffic Bearing Surface
- · Very High Build
- Long Product Shelf Life
- Return to Service 1 Hour after Final Coat

Colour Availability

Tinted

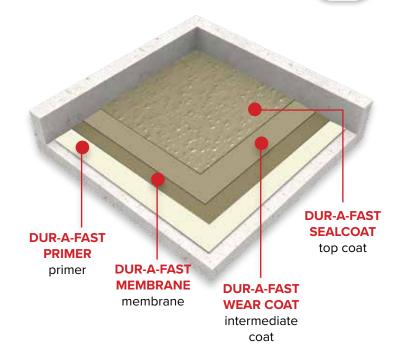

COMPONENT	PRODUCT	WFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	Dur-A-Fast Primer	10 mils	160 ft²/Gal	10°C to 35°C
MEMBRANE	Dur-A-Fast Membrane	80 mils	20 ft²/Gal	10°C to 35°C
INTERMEDIATE COAT	Dur-A-Fast Wearcoat + Broadcast Aggregate*	65 mils	25 ft²/Gal	10°C to 35°C
TOP COAT	Dur-A-Fast Sealcoat	20 mils	80 ft²/Gal	10°C to 35°C

^{*} Broadcast silica sand to refusal

