


Durex® Uraflex Garbage Room Waterproofing System

Garbage Storage Rooms & Apartment Complexes




Durex® Uraflex Garbage Room Waterproofing System is high performance uraflex system for high traffic traffic and load bearing floors. Perfect for garbage storage and disposal rooms, heavy equipment rooms, and apartment disposal areas. This system features two-component, odour-free coatings and very low VOC, and provides superior protection against extreme abrasion.

Uraflex Garbage Room Waterproofing System

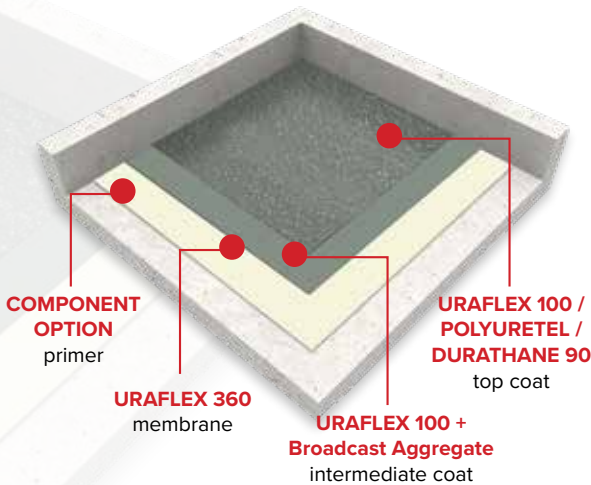

Uraflex Heavy Duty Garbage Room Waterproofing System

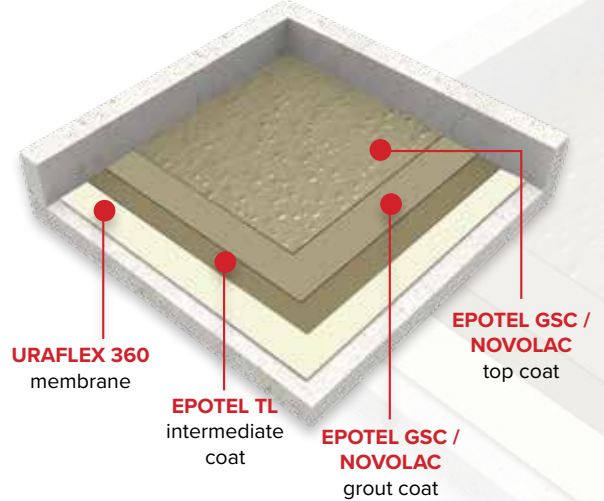

SYSTEM DESCRIPTION	COATING COMPONENTS				
	PRIMER	MEMBRANE	INTERMEDIATE COAT	GROUT COAT	TOP COAT
Uraflex Garbage Room Waterproofing System	See Chart on Page 11	Uraflex 360	Uraflex 100 + Broadcast Aggregate	Not Required	Uraflex 100 / Polyuretel / Durathane 90
<i>System Thickness: 1/8"</i>	-	<i>DFT: 32 mils @ 50 ft²/Gal</i>	<i>DFT: 35 mils + 1/16" @ 45 ft²/Gal</i>	N/A	<i>DFT: 10 mils @ 160 ft²/Gal</i>
Uraflex Heavy Duty Garbage Room Waterproofing System	Not Required	Uraflex 360	Epotel TL + Trowel Aggregate	Epotel GSC / Novolac	Epotel GSC / Novolac
<i>System Thickness: 1/4"</i>	-	<i>DFT: 32 mils @ 50 ft²/Gal</i>	<i>DFT: 1/4" @ 18 ft²/Kit</i>	<i>DFT: 10 - 20 mils @ 80 - 160 ft²/Gal</i>	<i>DFT: 10 mils @ 160 ft²/Gal</i>

Traffic Bearing Floor Coating Options

Use this chart to choose the necessary components for the performance requirements of your system.

Primer Options



Top Coat Options



PRIMER OPTION	ADVANTAGES / USE
Epotel Moisture Block	<p>Advantage: Moisture Mitigating (Blocking) Primer</p> <p>Use: For Concrete Slabs with high moisture content and freshly poured slabs (over 14 days old).</p> <p>Coverage: 72 ft²/Gal @22 mils 95 ft²/Gal @17 mils</p>
Uraflex Citrus Primer	<p>Advantage: Penetrating Primer that adheres to oil and similar contaminants</p> <p>Use: For oil or grease contaminated floors</p> <p>Coverage: 200 ft²/Gal @6 mils DFT</p>
Epotel Multi-Prime	<p>Advantage: Penetrating Primer. VOC Free</p> <p>Use: For better adhesion onto concrete</p> <p>Coverage: 200 ft²/Gal @8 mils DFT</p>
Epotel 80	<p>Advantage: Solvent Based Penetrating Primer</p> <p>Use: For better adhesion onto concrete</p> <p>Coverage: 250 ft²/Gal @7 mils DFT 400 ft²/Gal @4 mils DFT</p>

TOP COAT OPTION	ADVANTAGES / USE
Uraflex 375UV	<p>Advantage: Durable, abrasion resistant, UV stable top coat for traffic bearing waterproofing system</p> <p>Use: For all UV exposed traffic bearing surfaces</p> <p>Coverage: 107 - 160 ft²/Gal @ 10 - 15 mils DFT</p>