

# Durex® Epotel Moisture Block 100

Moisture Vapour Mitigation and Hydrostatic Pressure Control  
Coating System for Concrete Floors





## Ideal For

- Construction projects with tight schedules
- Parking Garages coated with traffic bearing waterproofing coatings
- Impermeable flooring systems such as stones, ceramics, vinyl composition tiles, hardwood,
- Laminate flooring and carpets, Seamless Flooring and Terrazzo Floors
- Existing slabs with high levels of hydrostatic pressure

## Features

- Class 1 Vapour Diffusion Retarder
- Very low permeance; Less than 0.1 perms
- Suppresses moisture from penetrating through the slab
- Can be used over Green Concrete 7 days after initial pour
- Speeds up construction time
- Virtually odourless and solvent free
- Excellent adhesion to damp concrete (520psi)
- Unaffected by high pH levels (up to 14)
- May be installed on floors with very high relative humidity

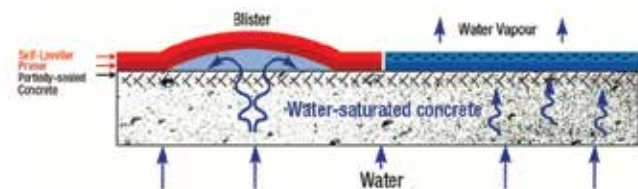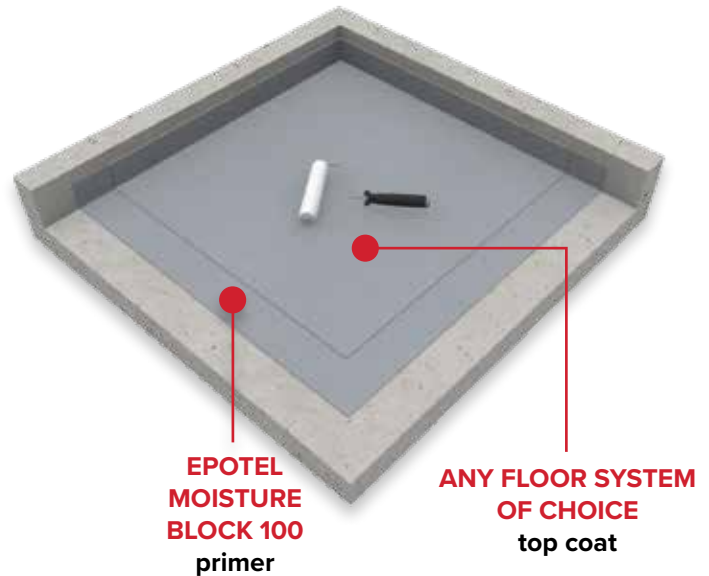

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	Epotel Moisture Block 100	Depends on Concrete Cure Time: 7 days: 22 mils 28 days: 17 mils	72 ft <sup>2</sup> /Gal 95 ft <sup>2</sup> /Gal	10°C to 30°C
TOP COAT	Any Floor System of Choice	Contact Durabond at (905) 565-9283 for project specific application instructions		