

Durex[®] Acrotel Procover Acrylic Wall Coating - Low VOC

Commercial, Institutional, Residential Interior Wall Coating



Ideal for

- Commercial, Institutional, Residential Interior Wall Coating

When to use


- Economical General Purpose Protective Paint
- Commercial, Institutional, Residential, Interior Walls

Features

- Low VOC
- Water Based Coating System
- Economical Coating System

Colour Availability

- Tinted

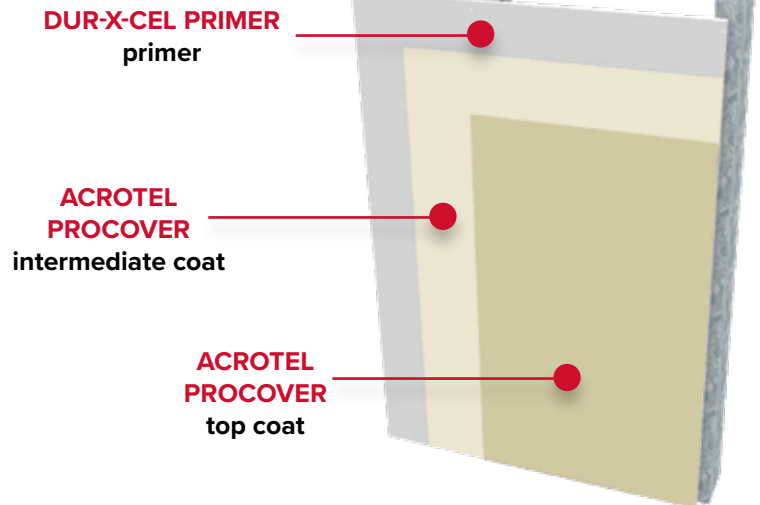

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	Dur-X-Cel Primer	2 - 4 mils	300 - 500 ft ² /Gal	5°C to 35°C
INTERMEDIATE COAT	Acrotel Procover	2 - 4 mils	100 ft ² /Gal	5°C to 35°C
TOP COAT	Acrotel Procover	2 - 4 mils	160 - 200 ft ² /Gal	5°C to 35°C

