

Durex® Acrotel WB Enamel Wall Coating

Commercial, Institutional, Residential Interior Wall Coating



Ideal for

- Commercial, Institutional, Residential Interior Wall Coating Subject to Higher Traffic

When to use


- Durable, Tough Wearing Commercial, Institutional Grade Coating
- High Traffic Maintenance Wall Paint
- Can be used on Interior and Exterior Surfaces

Features

- Low Maintenance Paint-Easy to Clean
- Water Based
- Excellent Replacement for Alkyd Paints
- Exterior Grade Quality Coating
- Very Low Odour

Colour Availability

- Tinted

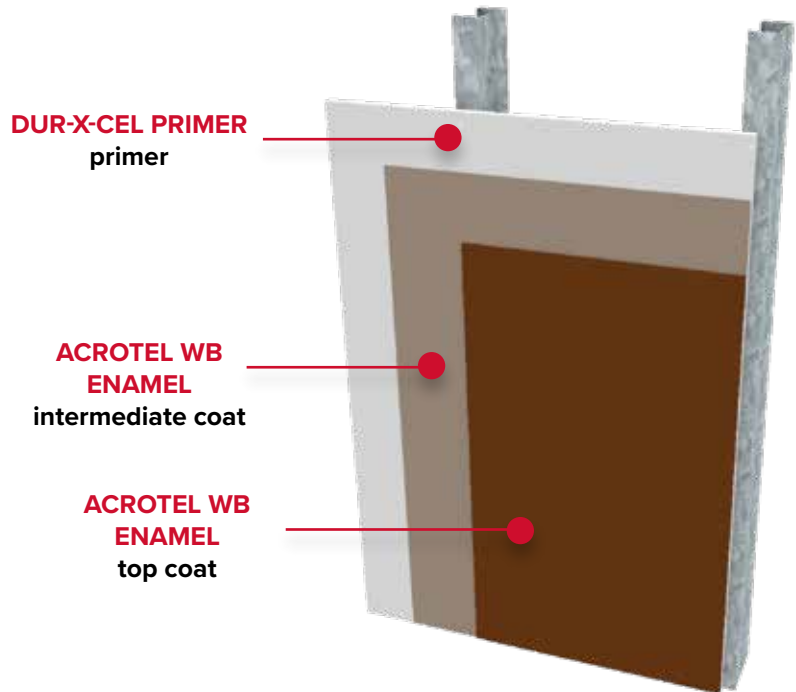

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	Dur-X-Cel Primer	2 - 4 mils	300 - 500 ft ² /Gal	4°C to 40°C
INTERMEDIATE COAT	Acrotel WB Enamel	2 - 3 mils	200 - 300 ft ² /Gal	4°C to 40°C
TOP COAT	Acrotel WB Enamel	2 - 3 mils	200 - 300 ft ² /Gal	4°C to 40°C