

# Durex® Duracrete Self-Leveling System

Industrial, Commercial, and Light to Heavy Duty Manufacturing Floors



## Ideal For

- Light to Heavy Duty Manufacturing Facilities
- Animal Laboratories & Housing
- Automotive Maintenance Facilities
- Institutional and Recreational Facilities
- Garbage and Laundry Rooms
- Traffic Aisles

## When to use


- *Dependant on Component Option*
- High Abrasion and Impact Resistance
- Good Mechanical & Chemical Resistance
- Easily Cleaned & Maintained
- Durable, Impermeable, and Seamless

## Features

- Does Not Support Bacteria or Fungi Growth
- Neutral Odour
- CFIA & USDA Approved

## Colour Availability

- Tinted + Clear

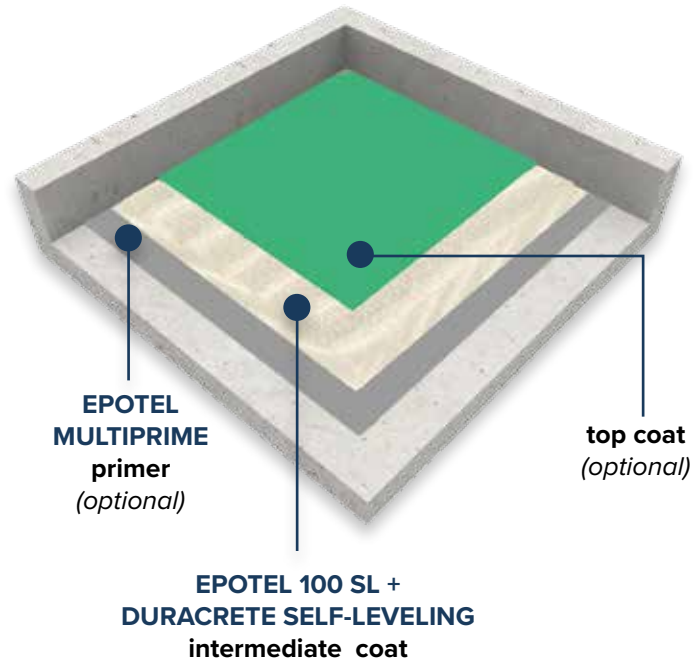

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER <i>(OPTIONAL)</i>	Contact Durabond for Primer options	-	-	-
INTERMEDIATE COAT	Epotel 100 SL + Duracrete Self-Leveling	60 - 80 mils	45 ft <sup>2</sup> /Gal	10°C to 35°C
TOP COAT <i>(OPTIONAL)</i>	Contact Durabond for Topcoat options	-	-	-

# Epoxy Flooring Systems | Self-Leveling Component Options

Use this chart to choose the necessary components for the performance requirements of your system.

System Component Option	Features	Coating System Components		
		Primer	Intermediate Coat	Topcoat
<p><b>Durex® Duracrete Self-Leveling with Epotel CR</b> <i>Chemical Resistant Floor</i></p> <hr/> <p><i>System Thickness : 1/8" (total system)</i></p>	<ul style="list-style-type: none"> <li>• High Commercial Quality</li> <li>• High Chemical Resistance</li> <li>• Fast Curing</li> </ul>		<p>Epotel 100 CR (60 mils) + Duracrete Self-Leveling</p>	<p>(optional top coat) Epotel 100 CR <i>(Multiple Coats Possible for Increased Protection)</i></p> <hr/> <p><i>DFT: 10 mils</i></p>
<p><b>Durex® Duracrete Self-Leveling with Epotel Novolac</b> <i>Outstanding Chemical Resistant Floor</i></p> <hr/> <p><i>System Thickness: 1/8" (total system)</i></p>	<ul style="list-style-type: none"> <li>• Ultra High Chemical Resistance</li> <li>• Best Available Chemical Resistance</li> </ul>	<p>Epotel Multiprime (optional)  <i>DFT: 8 mils</i></p>	<p>Epotel 100 Novolac (60 mils) + Duracrete Self-Leveling</p>	<p>(optional top coat) Epotel 100 Novolac <i>(Multiple Coats Possible for Increased Protection)</i></p> <hr/> <p><i>DFT: 10 mils</i></p>
<p><b>Durex® Duracrete Self-Leveling with Epotel SL</b> <i>High Performance Epoxy Floor</i></p> <hr/> <p><i>System Thickness: 1/8" (total system)</i></p>	<ul style="list-style-type: none"> <li>• Available in Rapid Cure</li> <li>• Cost Effective Versatile Protective Flooring</li> </ul>		<p>Epotel 100 SL (60 mils) + Duracrete Self-Leveling</p>	<p>(optional top coat) Epotel 100 SL <i>(Multiple Coats Possible for Increased Protection)</i></p> <hr/> <p><i>DFT: 10 mils</i></p>