

Durex® Dur-A-Fast Broadcast Decorative Flooring System

PMMA Based High-Build, Broadcasted Floor System



Ideal for

- Commercial / Industrial Display Areas Subject to UV Exposure
- Residential Applications & Outdoor Patios

When to use


- Decorative Floor Subject to Extreme Mechanical Abuse

Features

- Durable General Service Commercial Flooring
- Low Maintenance - Easy to Clean
- Natural Coloured Floor System
- Wide Colour Range
- Rapid Installation and Curing
- Available with Waterproofing Membrane

Colour Availability

- Pre-Blended
- Limited Colours

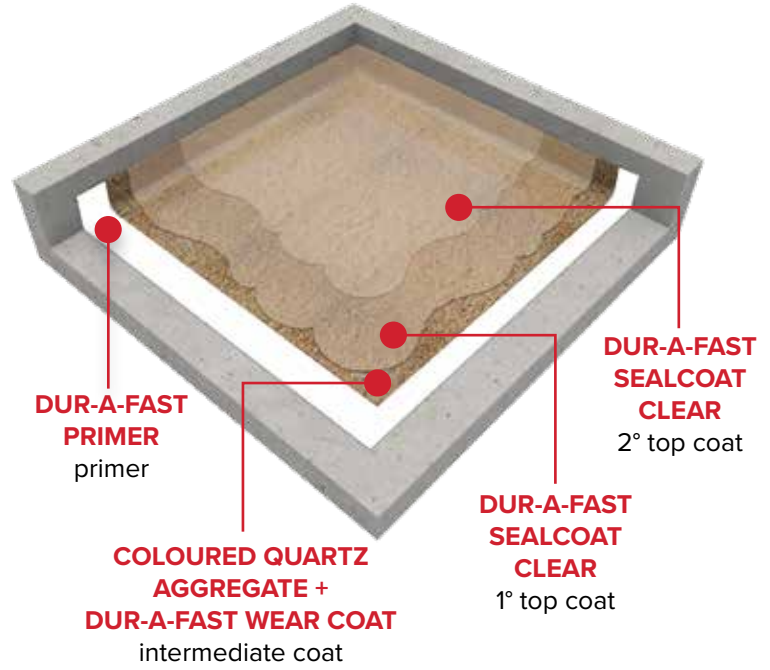

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	Dur-A-Fast Primer	8 mils	200 ft ² /Gal	-20°C to 30°C
INTERMEDIATE COAT	Coloured Quartz Aggregate & Dur-A-Fast Wear Coat	1/8" - 3/16"	35 ft ² /Gal	-20°C to 30°C
1° TOP COAT	Dur-A-Fast Sealcoat Clear or Polyuretel	10 mils	160 ft ² /Gal	10°C to 30°C
2° TOP COAT	Dur-A-Fast Sealcoat Clear or Polyuretel	10 mils	160 ft ² /Gal	10°C to 30°C

