

Durex® ART-I-STONE

Decorative Faux Stone Flooring



Ideal for

- Commercial / Industrial Display Areas Subject to UV Exposure
- Outdoor Patios & Walkways
- Driveways

When to use


- Residential

Features

- Versatile Artistic Floor System
- Very versatile Artistic Design Potentials
- Multitude of Pattern & Texture Potential

Colour Availability

- Custom Hand Tinted
- Decorated by Applicator

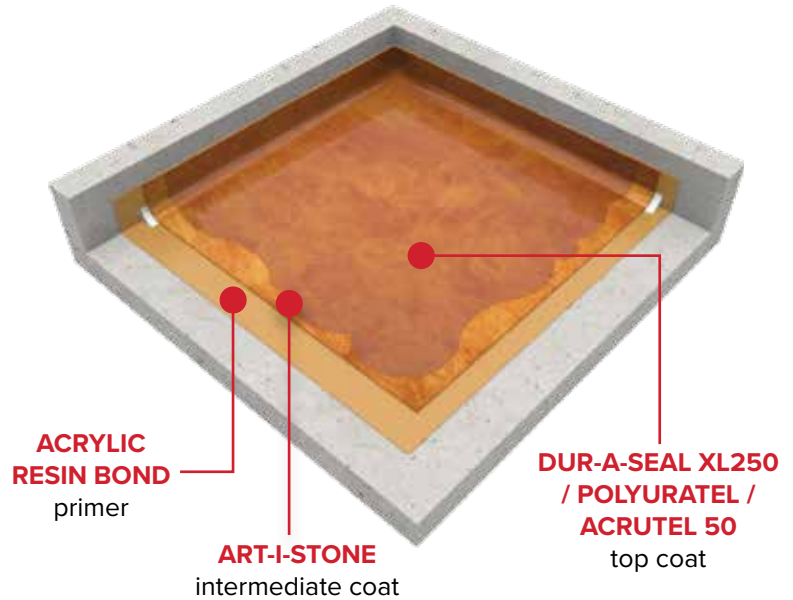

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	Acrylic Resin Bond	5 mils	200 ft ² /Gal	-
INTERMEDIATE COAT	Art-I-Stone	1/8" - 3/16"	35 ft ² /Bag	5°C to 30°C
TOP COAT	Dur-A-Seal XL250 / Polyuratel / Acrutel 50	5 - 7 mils	150 - 200 ft ² /Gal	5°C to 30°C

