

Durex® Dur-A-Comfort Reg

Ergonomic Polyurethane Floor System (3- 4mm)



Ideal For

- Laboratories and Hospitals
- Corridors and Hallways (Dry Areas)

When to use



- Institutional Flooring System
- Light to Medium Duty Floors with High Temperature and Chemical Resistance

Features

- Excellent Chemical Resistance
- Resist 80°C Water Temperatures
- High Abrasion Resistance
- Seamless and Hygienic Finish
- Easy-to-Clean and Sterilise
- Low Maintenance Cost
- Low Odour during Installation

Colour Availability

- Tinted (Any Colour)
- Chip Flakes

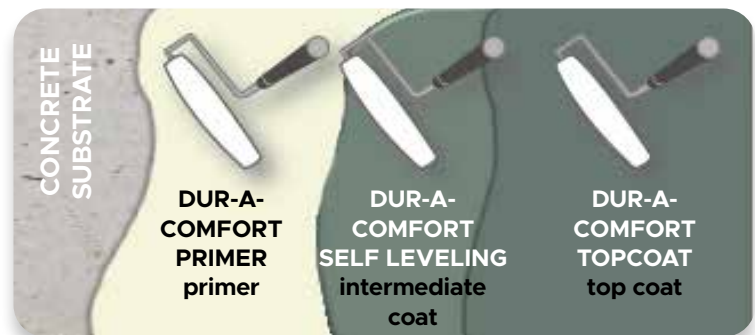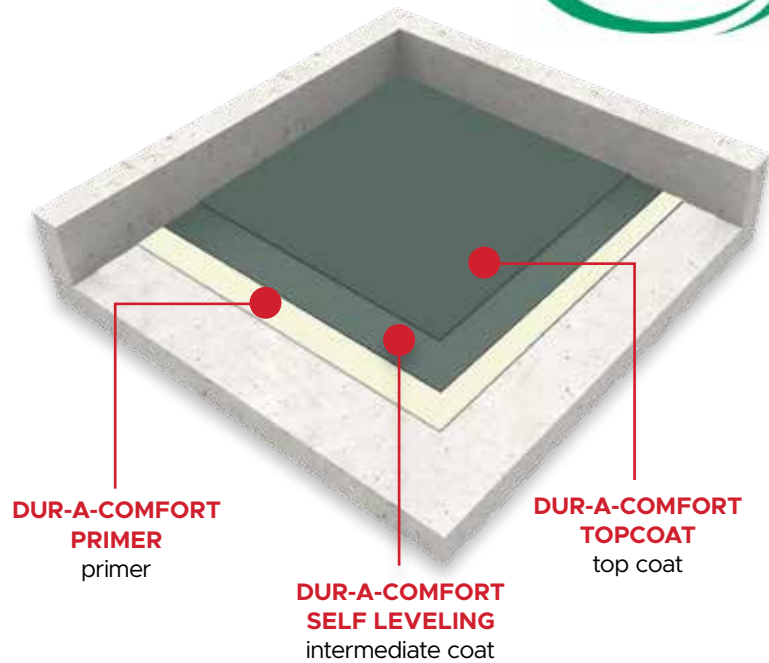

| COMPONENT | PRODUCT | DFT | COVERAGE | APPLICATION TEMPERATURE |
|-------------------|-----------------------------|-------------------------|------------------------------|-------------------------|
| PRIMER | Dur-A-Comfort Primer | 10 mils | 160 ft ² /gal | 10°C to 30°C |
| INTERMEDIATE COAT | Dur-A-Comfort Self Leveling | 120 - 160mils (3 - 4mm) | 10 - 13 ft ² /gal | 10°C to 30°C |
| TOP COAT | Dur-A-Comfort Topcoat | 5 mils | 320 ft ² /gal | 10°C to 30°C |