

Durex® Dur-A-Comfort REG

Ergonomic polyurethane floor system (3mm)



DESCRIPTION

Standard system for typical high traffic institutional areas

IDEAL FOR



Laboratories and hospitals
Corridors and hallways (dry areas)

FEATURES

- Excellent chemical resistance
- Resist 80°C water temperatures
- High abrasion resistance
- Seamless and hygienic finish
- Easy-to-clean and sterilise
- Low maintenance cost
- Low odour during installation

COLOUR AVAILABILITY

- Tinted (any colour)
- Chip flakes

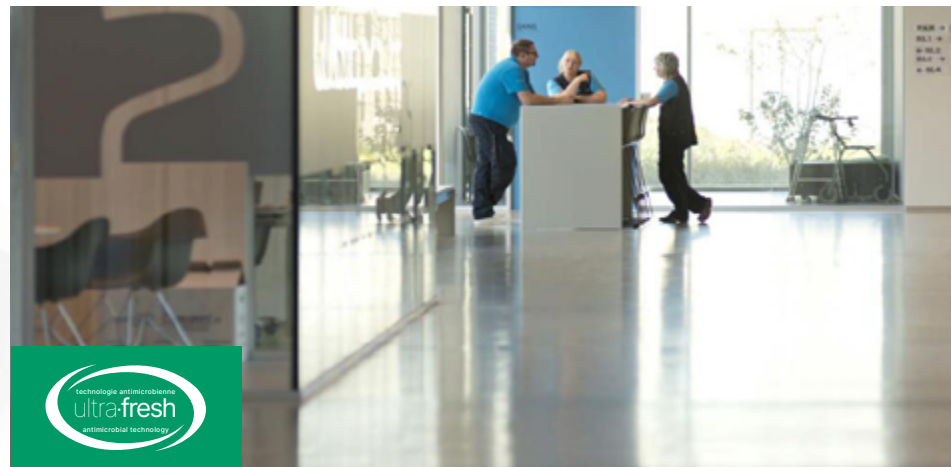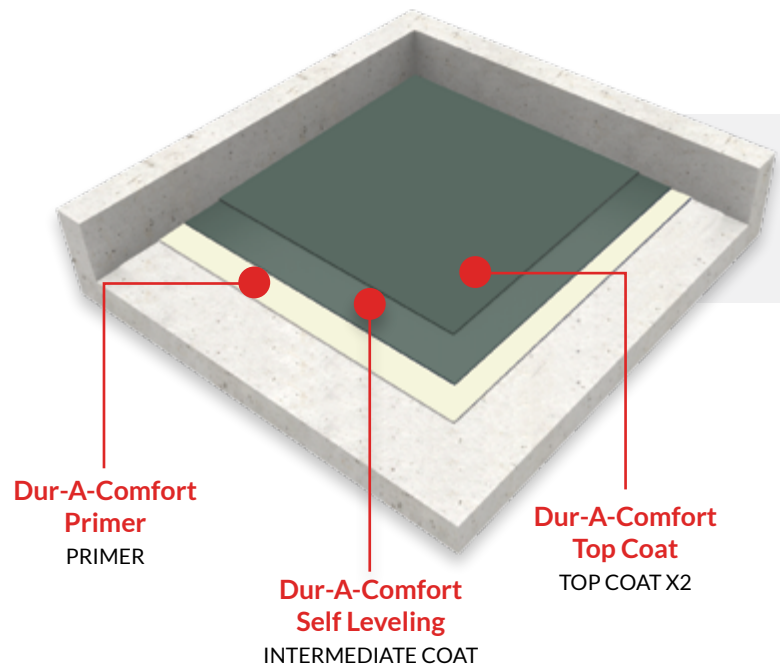

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
Primer	Dur-A-Comfort Primer	8 mils	200 ft ² /gal	10°C to 30°C
Intermediate Coat	Dur-A-Comfort Self Leveling	120 mils (3 mm)	45 ft ² /kit	10°C to 30°C
Top Coat x2	Dur-A-Comfort Top Coat	5 mils	320 ft ² /gal	10°C to 30°C