

Durex® Dur-A-Comfort ERGO SD

Ergonomic, sound absorbing, polyurethane system (6 mm)



DESCRIPTION

Extra shock absorbing via 4mm thick absorbing layer for additional comfort and sound dampening

IDEAL FOR


Laboratories and hospitals
Normal dry process areas

FEATURES

Extra sound and shock absorbing
Resist 80°C water temperatures
High abrasion resistance
Seamless and hygienic finish
Easy-to-clean and sterilise
Low maintenance cost
Low odour during installation

COLOUR AVAILABILITY

Tinted (any colour)
Chip flakes

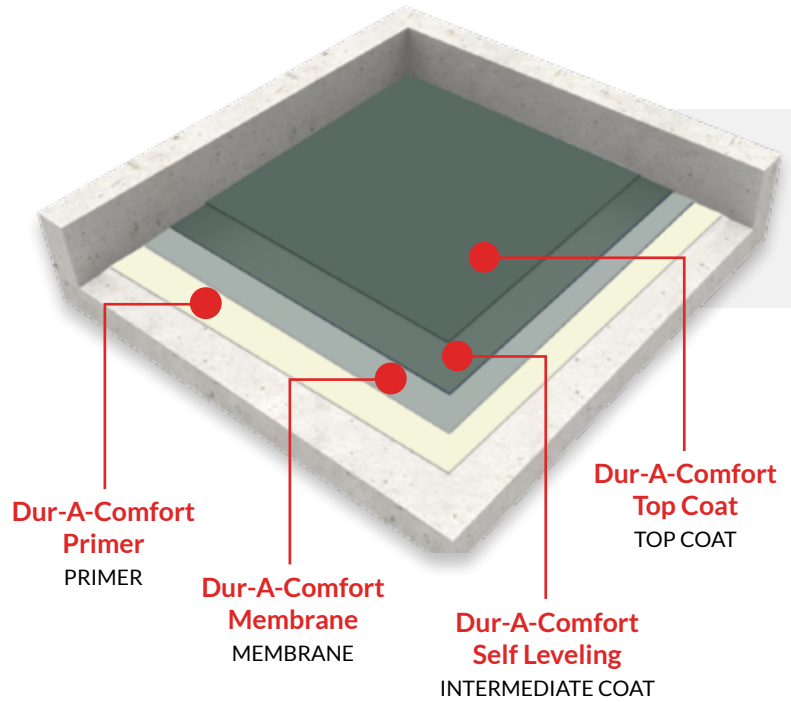

| COMPONENT | PRODUCT | DFT | COVERAGE | APPLICATION TEMPERATURE |
|-------------------|-----------------------------|-----------------|--------------------------|-------------------------|
| Primer | Dur-A-Comfort Primer | 8 mils | 200 ft ² /gal | 10°C to 30°C |
| Membrane | Dur-A-Comfort Membrane | 4 mm (160 mils) | 47 ft ² /kit | 10°C to 30°C |
| Intermediate Coat | Dur-A-Comfort Self Leveling | 2 mm (80 mils) | 70 ft ² /kit | 10°C to 30°C |
| Top Coat | Dur-A-Comfort Top Coat | 5 mils | 320 ft ² /gal | 10°C to 30°C |