

Durex® Dur-A-Wall UC-HB

Thick build, multi-layered, troweled coating system



DESCRIPTION

High traffic areas subject to high abrasion and thermal shock

IDEAL FOR

Washrooms and locker rooms

Wash down and clean room areas

Food and pharmaceutical plants

FEATURES



High quality protective coating

Extremely durable at 4 -6 mm thick

Resistant to yellowing

COLOUR AVAILABILITY

Tinted

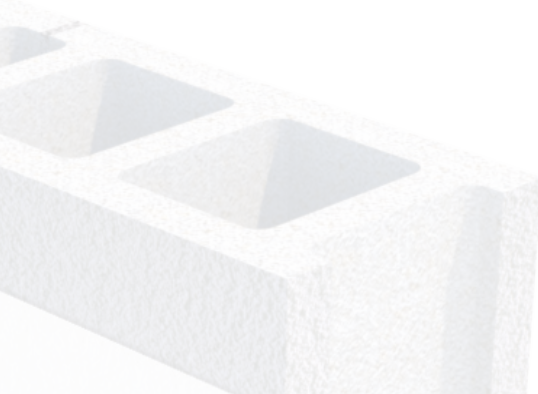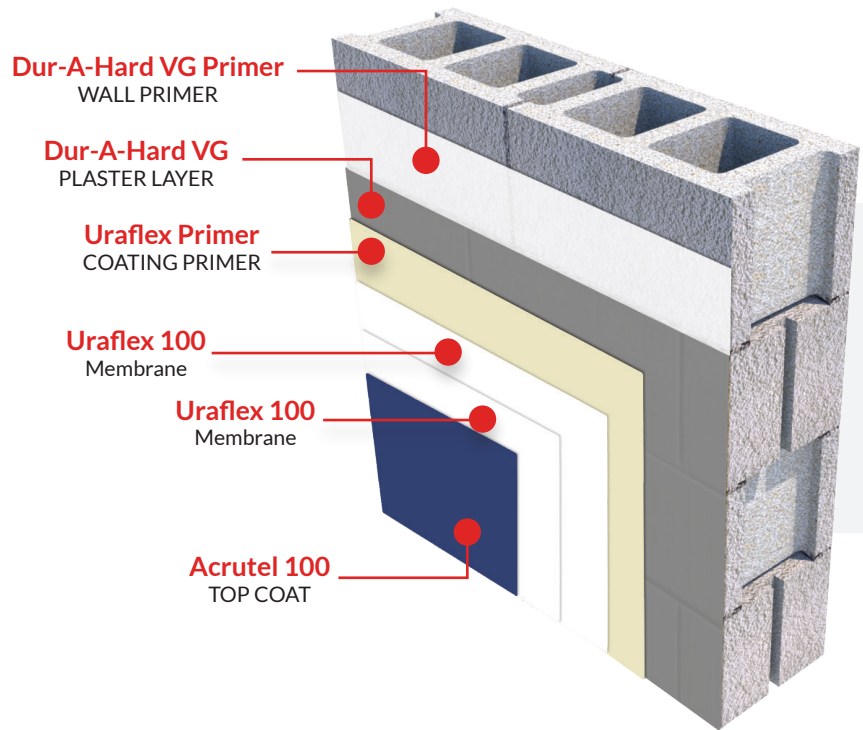

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
Wall Primer	Dur-A-Hard VG Primer	10 mils	160 ft ² /Gal	10°C to 35°C
Plaster Layer	Dur-A-Hard VG	6 mm (1/4 in)	15 ft ² /Gal	10°C to 35°C
Coating Primer	Uraflex Primer	8 mils	200 ft ² /Gal	10°C to 35°C
Membrane	Uraflex 100	12 mils	133 ft ² /Gal	10°C to 35°C
Intermediate Coat	Uraflex 100	10 mils	160 ft ² /Gal	10°C to 35°C
Top Coat	Acrutel 100	4 mils	320 ft ² /Gal	10°C to 35°C