

Durex® Acrotel WB Enamel

Enamel wall coating system



DESCRIPTION

Interior walled spaces subject to higher traffic like hallways, lobbies, waiting areas, and meeting rooms

IDEAL FOR

Commercial, institutional, residential interior wall coating

FEATURES

Low maintenance paint

Easy to clean

Water based paint


Excellent replacement for alkyd paints

Exterior grade quality coating

Very low odour

COLOUR AVAILABILITY

Tinted

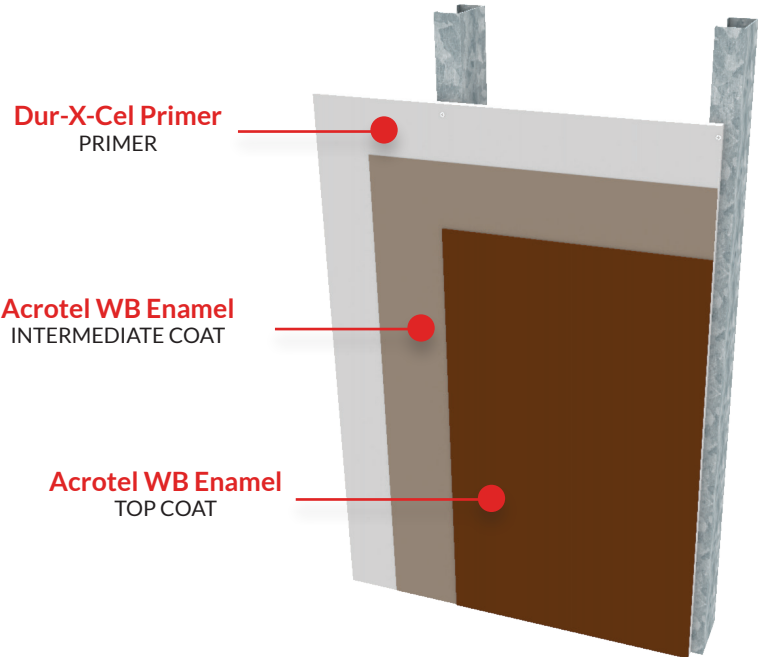

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
Primer	Dur-X-Cel Primer	2 - 4 mils	300 - 500 ft ² /Gal	4°C to 35°C
Intermediate Coat	Acrotel WB Enamel	2 - 3 mils	200 - 300 ft ² /Gal	4°C to 35°C
Top Coat	Acrotel WB Enamel	2 - 3 mils	200 - 300 ft ² /Gal	4°C to 35°C