

# Durex® Dur-A-Quartz Trowel

## Troweled Coloured Quartz Flooring System



### Ideal For

- Commercial / Industrial Display Areas
- Sloped Floors
- Heavy Duty Institutional seamless wet areas

### When to use


- Decorative Floor Requiring Ultimate Protection from Mechanical Abuse
- Sloped Areas, Washrooms, Wash Bays

### Features

- Durable Decorative Flooring
- Low Maintenance - Easy to Clean
- Coloured Floor System
- Wide & Customizable Colour Range (solid and mixed colours)

### Colour Availability

- Pre-Blended Aggregates
- Custom Blends Available

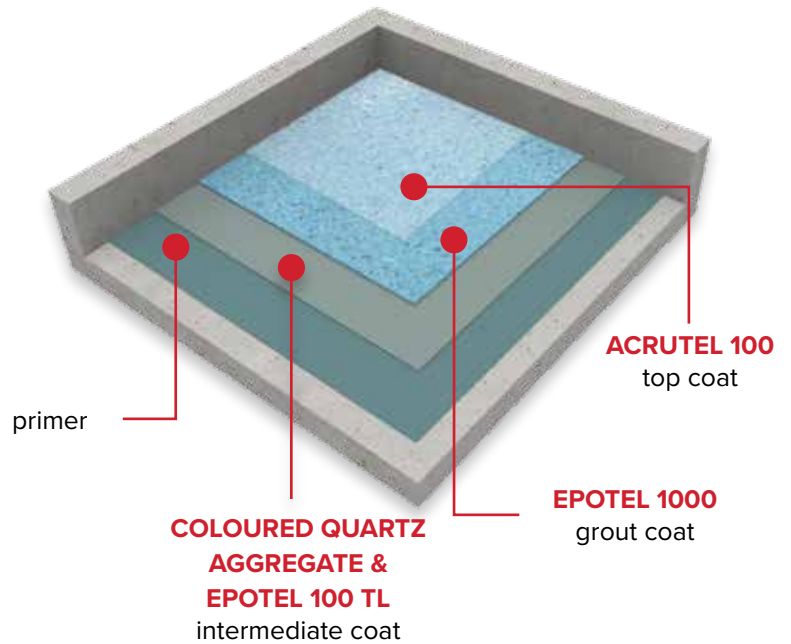

*For exterior use, or high UV exposure, please contact your Durabond Technical Representative*

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER <i>OPTIONAL</i>	See Primer Options Chart	-	-	-
PRIMER	Epotel TL	8 mils	200 ft <sup>2</sup> /Gal	10°C to 30°C
INTERMEDIATE COAT	Coloured Quartz Aggregate & Epotel 100 TL	1/4" - 1/8"	35 - 70 ft <sup>2</sup> /Gal	10°C to 30°C
GROUT COAT	Epotel 1000	15 - 20 mils	80 - 120 ft <sup>2</sup> /Gal	10°C to 30°C
*TOP COAT	Acrutel 100	5 mils	300 ft <sup>2</sup> /Gal	10°C to 30°C

\*See topcoat chart for different topcoat options.