

Durex® Duracrete Self-Leveling System

Industrial, Commercial, and Light to Heavy Duty Manufacturing Floors



Ideal For

- Light to Heavy Duty Manufacturing Facilities
- Animal Laboratories & Housing
- Automotive Maintenance Facilities
- Institutional and Recreational Facilities
- Garbage and Laundry Rooms
- Traffic Aisles

When to use


- *Dependant on Component Option*
- High Abrasion and Impact Resistance
- Good Mechanical & Chemical Resistance
- Easily Cleaned & Maintained
- Durable, Impermeable, and Seamless

Features

- Does Not Support Bacteria or Fungi Growth
- Neutral Odour
- CFIA & USDA Approved

Colour Availability

- Tinted + Clear

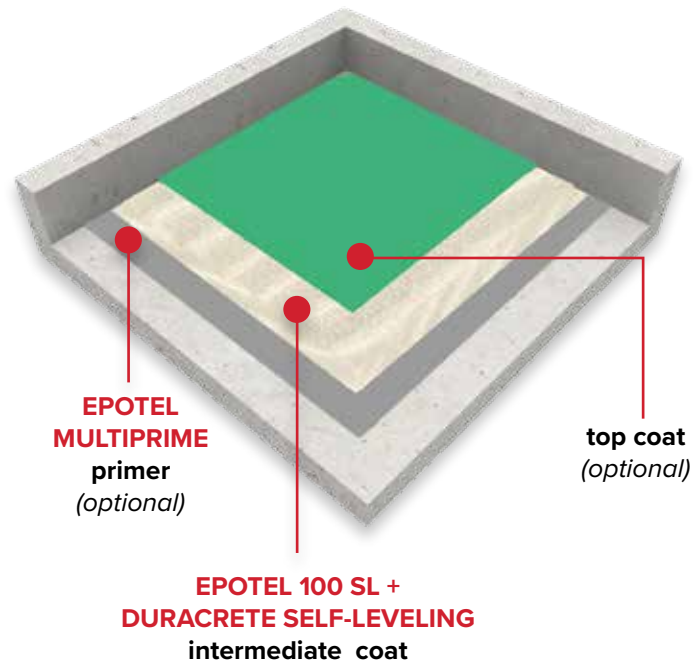

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER <i>(OPTIONAL)</i>	See Primer Options Chart	-	-	-
INTERMEDIATE COAT	Epotel 100 SL + Duracrete Self-Leveling	60 - 80 mils	45 ft ² /Gal	10°C to 35°C
TOP COAT <i>(OPTIONAL)</i>	See Top Coat Options Chart	-	-	-

