

Durex® Epoxy Guard Pro Protective Coating

Low Yellowing, Protective Flooring

Ideal for

- Institutional Floors
- · Public Washrooms and Locker Rooms
- Building Maintenance Coating
- · Slab on Grade Applications
- Durable Wall Coating

When to use


- · Lighter Duty Applications
- · Residential Applications
- Slab on Grade

Features

- · High Quality Protective Coating
- · Durable Coating, Easy to Clean
- · Resistant to Yellowing
- Breathable

Colour Availability

Tinted

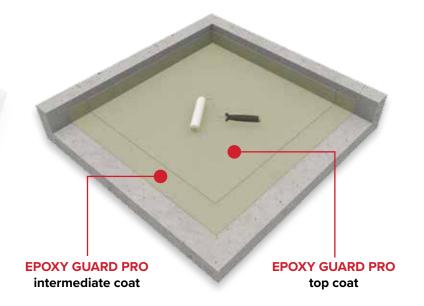

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER (OPTIONAL)	See Chart on Page 17	-	-	-
INTERMEDIATE COAT	Epoxy Guard Pro	3 mils	260 ft²/Gal	10°C to 35°C
TOP COAT	Epoxy Guard Pro	3 mils	260 ft²/Gal	10°C to 35°C

