

Durex® Polyaspartic Flooring System

Heavy UV Resistance, High Traffic, & Exterior Applications



Ideal For

- UV Exposed and Exterior Areas
- Abrasion Prone Areas

When to use


- Floor Subject to UV Exposure

Features

- Polyaspartic Resin Base
- High UV Resistance
- Extremely Durable
- Noise Reduction Properties
- CFIA Approved
- Rapid Drying, Quick Turnaround



Available with Ultra Fresh Anti-Microbial Technology

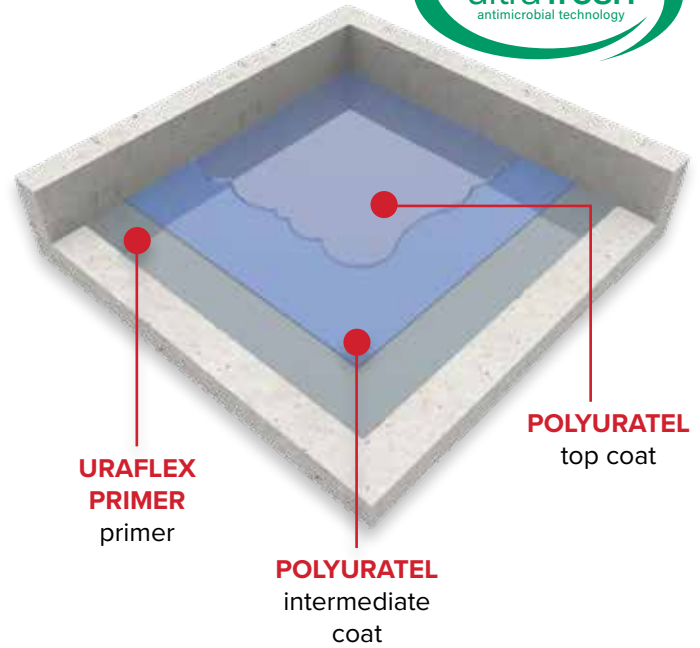

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER <i>(OPTIONAL)</i>	Uraflex Primer	8 mils	200 ft ² /Gal	10°C to 35°C
INTERMEDIATE COAT	Polyuratel	5 - 7 mils	225 - 320 ft ² /Gal	10°C to 35°C
TOP COAT	Polyuratel	5 - 7 mils	225 - 320 ft ² /Gal	10°C to 35°C