

Durex® Dur-A-Fast Traffic Bearing Waterproofing System

High abrasion resistant PMMA based traffic bearing waterproofing system



IDEAL FOR

Parking decks & structures, turn and drive lanes, and helical turn ramps requiring rapid return to service

FEATURES

PMMA Technology

Very effective waterproofing membrane - 100% solids

Extra high traffic bearing surface


Very high adhesion & abrasion resistance

Long product shelf life

Return to service 1 Hour after final coat

COLOUR AVAILABILITY

Tinted

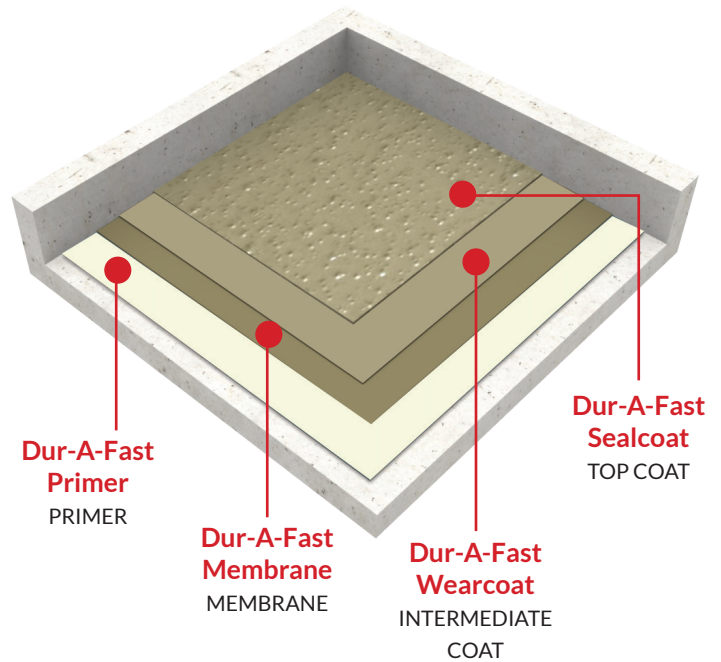

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
Primer	Dur-A-Fast Primer	10 mils	160 ft ² /Gal	10°C to 35°C
Membrane	Dur-A-Fast Membrane	80 mils	20 ft ² /Gal	10°C to 35°C
Intermediate Coat	Dur-A-Fast Wearcoat + Broadcast Aggregate*	65 mils	25 ft ² /Gal	10°C to 35°C
Top Coat	Dur-A-Fast Sealcoat	20 mils	80 ft ² /Gal	10°C to 35°C

* Broadcast silica sand to refusal