



Durex[®] Ecto-Sil 1000 Silicone Elastomeric Protective Coating

High Rise, Existing Structure and Building Maintenance

Ideal for

- High Rise
- Existing Structure and Building Maintenance

When to use


- High Rise Condominium & Apartment Buildings
- Several different types of cladding

Features

- Elastomeric Silicone Cold Weather application (up to -10C)
- Excellent UV Stability (Silicone is not degraded by sunlight)
- High Elongation

Colour Availability

- Tinted

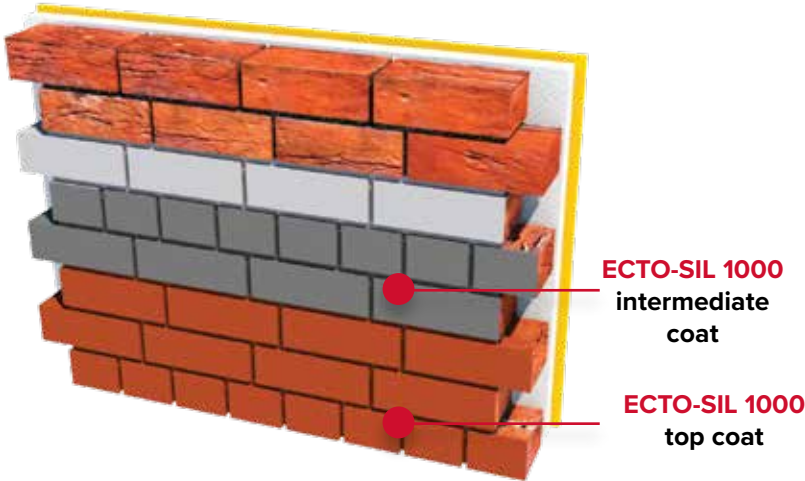

COMPONENT	PRODUCT	DFT	COVERAGE	APPLICATION TEMPERATURE
PRIMER	N/A	N/A	N/A	N/A
INTERMEDIATE COAT	Ecto-Sil 1000	5 mils	106 ft ² /Gal	-10°C to 40°C
TOP COAT	Ecto-Sil 1000	5 mils	106 ft ² /Gal	-10°C to 40°C

