

Durex® Uraflex Quartz Broadcast Decorative Waterproofing System

High Build Decorative Pedestrian Traffic Bearing Coating System



Ideal for

- Decorative High Traffic Balconies
- UV Exposed, Suspended Slab Applications
- Decorative Pedestrian Traffic Waterproofing

When to use



- Balconies requiring decorative finish
- Decorative, suspended slab applications

Features

- ASTM C-957 Tested Waterproofing Membrane
- Seamless, Durable & Decorative
- Low Maintenance, Easy to clean

Colour Availability

- Custom colours available

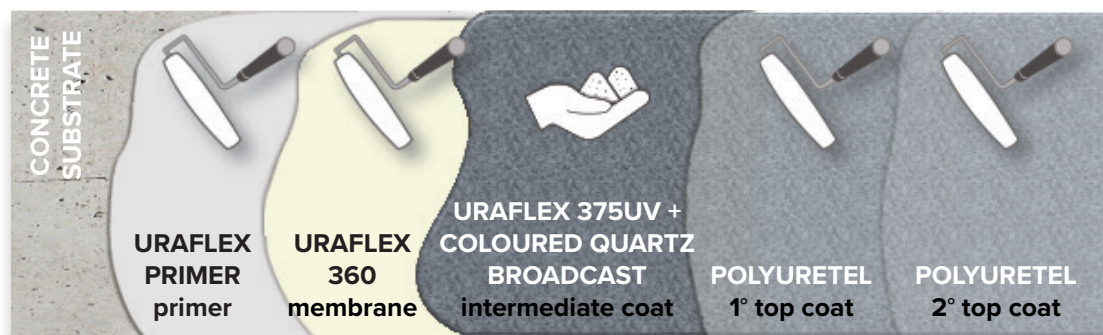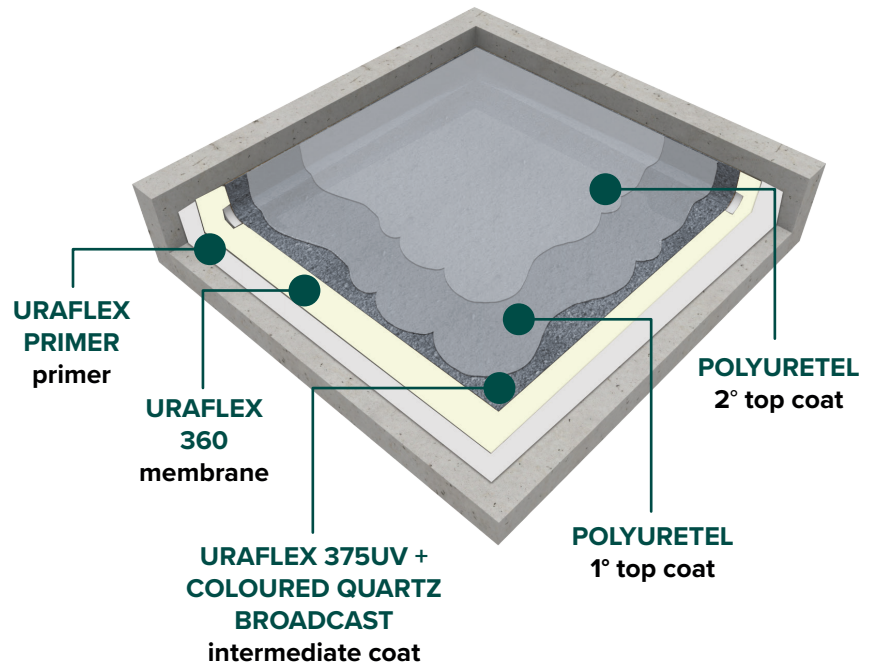

| COMPONENT | PRODUCT | DFT | COVERAGE | APPLICATION TEMPERATURE |
|-------------------|---|---------------|--------------------------|-------------------------|
| PRIMER | Uraflex Primer | 5 mils | 320 ft ² /Gal | 10°C to 30°C |
| MEMBRANE | Uraflex 360 | 30 mils | 53 ft ² /Gal | 10°C to 30°C |
| INTERMEDIATE COAT | Uraflex 375UV + Coloured Quartz Broadcast | 1/16" - 3/16" | 35 ft ² /Gal | 10°C to 30°C |
| 1° TOP COAT | Polyuretel | 10 mils | 160 ft ² /Gal | 10°C to 30°C |
| 2° TOP COAT | Polyuretel | 10 mils | 160 ft ² /Gal | 10°C to 30°C |